



Contents lists available at <http://qu.edu.iq>

Al-Qadisiyah Journal for Engineering Sciences

Journal homepage: <https://qjes.qu.edu.iq/>



A GWO-PID controller with advanced optimization features for DC-DC converters

Muhanad D. Hashim Almawlawe¹, Hassan. Naji¹, Al-Sharify Mushtaq Talib², Musa Wali¹

¹Electronic and Telecommunication Department, Faculty of Engineering, University of Al-Qadisiyah, Iraq

²Electronics, and Computer Systems, Faculty Taras Shevchenko, National University of Kyiv, Kyiv, Ukraine

ARTICLE INFO

Article history:

Received 10 April 2023

Received in revised form 15 June 2023

Accepted 20 October 2023

Keywords:

DC-DC Converter

PID

GWO

GA

PSO

ITAE

ABSTRACT

This work seeks to use both traditional control algorithms and advanced optimization algorithms to enhance the performance of a DC-DC converter. The chosen algorithm was Proportional-Integral-Derivative (PID) based on gray wolf optimization (GWO). The PID controller is known for its ease of control and wide range of industrial applications. This type of controller has been used successfully in many types of systems, such as power electronics, automation systems, robotics, etc., due to its ability to effectively optimize the system's parameters with minimal effort from the user. To test this new technique on a DC-DC converter different simulations were conducted using MATLAB environment where various parameters were set that can simulate various uses for the DC-DC converter within electrical systems. After conducting these tests it was found that PID based on GWO controller had good performance (rise time 0.0004 sec, settling time 0.0001sec) when compared with other traditional controllers (rise time 0.00416 sec, settling time 0.000323sec), reliability, efficiency higher accuracy, low cost, etc. As expected GWO showed better results than conventional methods like PID or PI controllers due to the fact that it's an evolutionary approach that allows more flexibility during the configuration process.

© 2023 University of Al-Qadisiyah. All rights reserved.

1. Introduction

The DC-DC converter has been around for many years and is an important part of power electronics. It was first developed in the 1950s as a way to convert direct current (DC) electricity from one voltage level to another, allowing for better control of the device's power and performance. According to previous, these devices can work effectively with electric vehicles, sustainable energy systems, airborne electronics, and many modern appliances [1-7]. Such a DC-DC converter can be illustrated in Fig. 1. Which main act as a reliable DC power source. Nevertheless, in spite of their robustness and dynamic operation range, these converters still reflect

effective disadvantages in the real world which could affect the performance of the converter and try to reduce its efficiency.

Considering depending on the above, different methods and approaches can be adopted to reduce the impact of these defects [8-10]. Digital control techniques are considered one of the most effective methods to improve transformer performance such as pulse width modulation (PWM) or digital signal processing (DSP) [11-13].

* Corresponding author.

E-mail address: muhanad.almawlawe@qu.edu.iq (Muhanad D. Hashim Almawlawe)

<https://doi.org/10.30772/qjes.2023.180482>

2411-7773© 2023 University of Al-Qadisiyah. All rights reserved.



This work is licensed under a Creative Commons Attribution 4.0 International License.

Nomenclature:

$u(t)$ controller output.
 K_{prop} proportional gain.
 $K_{int.}$ integral gain,
 $K_{der.}$ derivative gain.
 $E_{error}(t)$ error signal.

$Y(s)$ Output.
 $U(x)$ Input.

V_{source} Input voltage.
 V_{load} Output voltage.
 L Inductor.
 C_s Capacitor.
 R_{Load} Load resistance.

\vec{X}_a Position of the first wolf.
 \vec{X}_b Position of 2nd wolf.
 \vec{X}_c Posit. of the 3rd wolf.
 a Coefficient value over the period of iteration.
 \vec{r}_1, \vec{r}_2 Random values

Greek symbols

α_c Sensor gain.
 α First wolf.
 β Second wolf.
 δ Third wolf.

Subscripts

c controller
 p Proportional
 i integral
 d derivative

But one of the most common controllers which can handle errors which is the result from the linear operating procedure of the system is the conventional PID controllers [14-16].

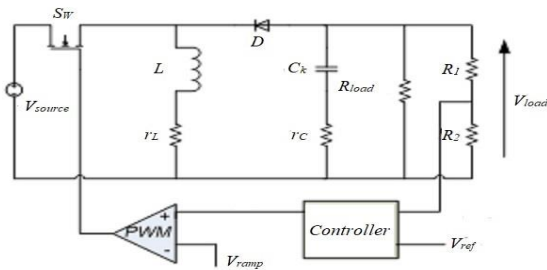


Figure 1. The main component of the DC-DC converter [8]

To enhance the functioning of this linear system, a control unit is used to create an algorithm. However, traditional techniques such as the Ziegler-Nichols method which is a well-known tuning technique used to optimize controller performance. This method involves gradually increasing the proportional gain until the system reaches instability. The value of K_p at the point of instability is known as K_{max} , while the frequency of oscillation is referred to as f_0 . Although this method has been widely used, it does have certain limitations in terms of performance optimization, so advanced optimization solutions had to be found. These involve genetic algorithms (GA) [17], particle swarm optimization (PSO) [18], and GWO [19]. All these approaches simulate hunter-prey dynamics as well as iterative processes based on similar cases or experiences accumulated over time. The main advantage that comes with using advanced optimization solutions such as GWO is that it can provide better results than conventional methods in terms of accuracy and speed when it comes to solving complex problems involving multiple variables. The GWO incorporate a “leader” concept into its structure allowing them to achieve faster convergence rates compared with other evolutionary algorithms due mainly because it eliminates redundant computations during iterations by following only one leader at each step instead all individuals.

This paper attempts to develop a PID tuning scheme using GWO algorithm that can automatically adjust the PID parameters to improve the working performance of the voltage regulation.

An integral time absolute value (ITAS) is chosen as a target function which is an important metric used to measure the performance of a system by measuring the difference between a desired output and actual output over time [18].

2. Proposed approach

A PID controller combines Proportional, Integral, and Derivative gains to provide precise control over a system. As shown in Fig. 2, a feedback control system is created by linking input ($r(t)$), error signal ($e(t)$), controller output ($y(t)$), and controlled variable ($u(t)$) respectively.

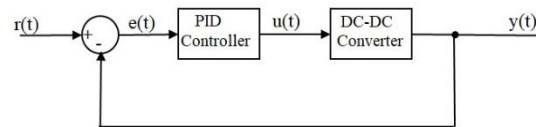


Figure 2. Typical feedback system [16]

The mathematical model for the PID controller can be derived from [16]:

$$u_c(t) = K_{prop.} * E_{ror}(t) + K_{int.} * \int_0^t E_{ror}(t) dt + K_{der.} * \frac{d}{dt} E_{ror} \quad (1)$$

The mathematical model for the DC-DC converter is derived from [19]:

$$G_{-}(s) = \frac{Y_{-}(s)}{U_{-}(s)} = \frac{\alpha(V_{source} - V_{load})}{L * C} \cdot \frac{1}{s^2 + \left(\frac{1}{R_{load} * C}\right) s}; \quad \alpha_c = 0.2083 \quad (2)$$

Where: V_{source} - source voltage, V_{load} -load voltage, L - inductance, C - capacitance, R_{load} - load resistance. The ITAE model is equal [20]:

$$ITAE_{-} = \int_0^{\infty} t * |e(t)| dt \tag{3}$$

Figure 3 represents the model of ITAE:




Figure 3. Proposed approach (ITAE)

The Gray Wolf Optimization (GWO) algorithm is an optimization technique based on the hunting mechanism of Gray Wolves in the real world. It is an iterative method which means that after some iterations, the fitness function tries to reach a planned value. The GWO algorithm consists of four types of Gray Wolf: alpha, beta, delta, and omega - each representing a different level within their hierarchical structure as shown in Fig. 4. The proposed approach of implementing the Gray Wolf Optimization (GWO) algorithm to fine-tune the coefficients (K_{Prop} , K_{Int} , K_{Der}) of a PID controller is a highly effective method of enhancing its performance. GWO is a sophisticated meta-heuristic optimization technique that draws inspiration from the hunting behavior of gray wolves in the wild. This allows for the speedy identification and implementation of optimal solutions through exploration and exploitation techniques, which are highly beneficial when used with PID controllers see Fig. 5.




Figure 4 Suggested approach




Figure 5. GWO hierarchical structure

The GWO method for tuning coefficients of PID controller can be summed up as:

- 1- Define the transfer function of the converter.
- 2- Define controller coefficients (K_p, K_i, K_d) which represent objective function;
- 3- Define GWO parameters (α, β, γ).
- 4- Initialize the population (n).
- 5- Initialize the alpha, beta, and delta values.
- 6- Initialize the positions of the alpha, beta, and delta wolves.
- 7- Iterate for a fixed number of iterations (n -iterations).
- 8- Update the positions of the wolves.
- 9- Compute the fitness value for the current position.
- 10- Update the positions of the rest of the wolves.
- 11- Compute the new position of the wolf.
- 12- Update the position of the wolf.
- 13- Find the final solution is the position of the alpha wolf.

the equations in [20]:

$$\begin{aligned} \vec{X}_a &= \vec{X}_\alpha - ((\vec{D}_\alpha) \times (\vec{A})); \\ \vec{X}_b &= \vec{X}_\beta - ((\vec{D}_\beta) \times (\vec{A})); \\ \vec{X}_c &= \vec{X}_\delta - ((\vec{D}_\delta) \times (\vec{A})); \end{aligned} \tag{4}$$

$$\begin{aligned} \vec{D}_\alpha &= ((\vec{C}) \times (\vec{X}_\alpha - \vec{X})); \\ \vec{D}_\beta &= ((\vec{C}) \times (\vec{X}_\beta - \vec{X})); \\ \vec{D}_\delta &= ((\vec{C}) \times (\vec{X}_\delta - \vec{X})); \end{aligned} \tag{5}$$

$$\begin{aligned} \vec{A} &= 2\vec{a} \cdot \vec{r}_1 - \vec{a}; \\ \vec{C} &= 2\vec{r}_2; \\ \vec{a} &: (2 \rightarrow 0) \\ \vec{r}_1, \vec{r}_2 &: \end{aligned} \tag{6}$$

$$\vec{X}_{-new}(t+1) = \frac{1}{3}(\vec{X}_a + \vec{X}_b + \vec{X}_c); \tag{7}$$

The flow chart diagram of GWO is shown in Fig. 6.

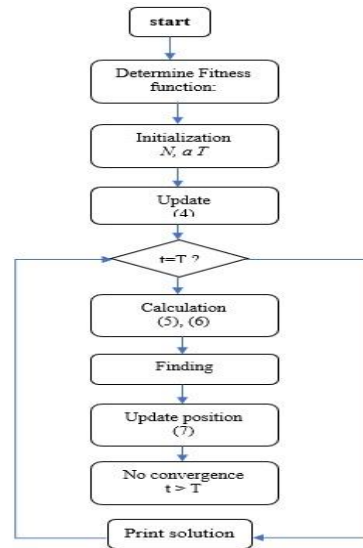


Figure 6. Flow chart of GWO

Table 1. Components value (Figure 1)

Component	Description	Value
V_{source}	Input voltage	12V
V_{Load}	Output voltage	24V
C_k	Capacitor	1470 μ F
L	Inductor	330 μ H
R_{load}	Output resistance	3 Ω
f_{PWM}	Pulse width modulation frequency	7.874kHz

The mathematical representation of the GWO can be calculated utilizing

3. Simulation results

The simulation process is supplied in Table 1, which states the converter parameter values.

This process is divided into three scenarios: the first one without a P-I-D controller Figs. 7, and 8, the second one with a P-I-D controller based on the Ziegler-Nichols method Figs. 9, and 10, and the third one using a P-I-D controller and GWO Figs. 11, and 12.




Figure 7 Model without PID controller

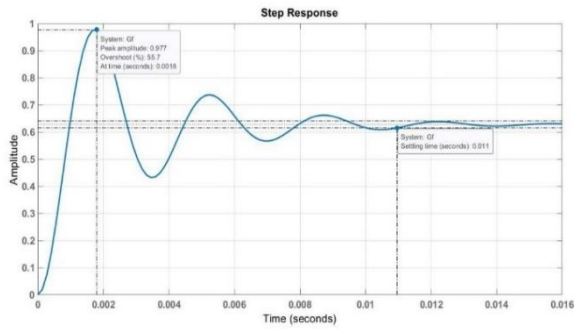


Figure 8. Simulation result without PID controller




Figure 9. Model with PID controller.

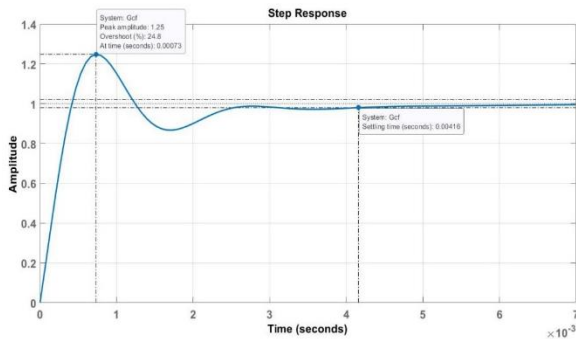


Figure 10. Simulation with PID controller

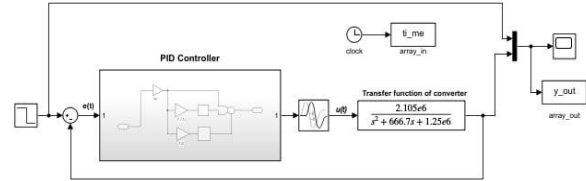


Figure 11. Model of PID controller using GWO

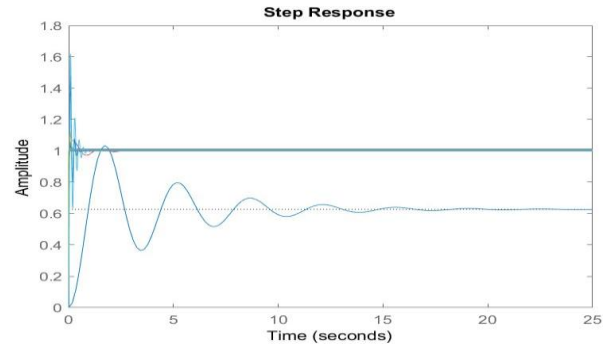


Figure 12. Simulation of PID controller using GWO

Table 2. Results of scenarios

Approach		Overshoot %	Rise time(S)	Settling time(s)
Converter controller	without	55.7	0.011	0.0018
Convertor	with PID Using Z-N	24.8	0.00416	0.000323
Converter using PID with GWO		-	0.0004	0.0001

4. Conclusion

In this paper, a proper tuning (K_p , K_i , K_D) of PID controllers is adopted using the GWO optimization method. A comparison of responses of the PID controller using the Ziegler-Nichols method and a PID controller using the GWO algorithm has been considered in terms of the system overshoot, settling time, and rise time. Ziegler Nichols method in terms of the system overshoot, settling time, and rise time.

The designed PID controller using the GWO algorithm gives a powerful performance benefit over the traditional Ziegler-Nichols method, exhibiting lower system overshoot, settling time, and rise time. Utilizing modern AI optimization to complement the PID controller designed by the conventional method provides an optimal tuning solution. Among the many optimization tools available, GWO is a recent and efficient choice as it was proved in the simulation part.

Authors' contribution

All authors contributed equally to the preparation of this article.

Declaration of competing interest

The authors declare no conflicts of interest.

Funding source

This study didn't receive any specific funds.

REFERENCES

- [1] Z. Rehman, Ibrahim Al-Bahadly, Subhas Mukhopadhyay, "Multiinput DC–DC converters in renewable energy, applications – An overview", *Renewable and Sustainable Energy Reviews*, vol 41, January 2015, Pages 521–539. doi:10.1016/j.rser.2014.08.033.
- [2] M. LEŠO, J. ŽILKOVÁ, M. BIROŠ, P. TALIAN, "Survey of Control Methods for DC-DC Converters", *Acta Electrotechnica et Informatica*, vol. 18, No. 3, 2018, pp. 41–46, DOI: 10.15546/aei-2018-0024.
- [3] M. Hashim, A. Fahem, Issam Jassim "A study for conversion of mechanical control system to electrical control system", *DJES*, vol. 5, no. 1, pp. 88–102, Jun. 2012. <https://doi.org/10.24237/djes.2012.05108>
- [4] Methaq A. Ali a* , Abbas Hussein Miry b, Tariq M. Salman, Implementation of Intelligent Industrial Controller Based On Fuzzy Logic and PLC, *Al-Qadisiyah Journal for Engineering Sciences*, 2020, 13, 55-60. <https://doi.org/10.30772/qjes.v13i1.626>
- [5] Nikhil Paliwal, Laxmi Srivastava & Manjaree Pandit Application of grey wolf optimization algorithm for load frequency control in multi-source single area power system. *Evolutionary Intelligence*, 2022, 15, 563-584. DOI: 10.1007/s12065-020-00530-5
- [6] Yuchen Duan , Xiaobing Yu, A collaboration-based hybrid GWO-SCA optimizer for engineering optimization problems, (2023) 213. <https://doi.org/10.1016/j.eswa.2022.119017>
- [7] Neeraj Jain, Girish Parmar, Rajeev Gupta and Iram Khanam, Performance evaluation of GWO/PID approach in control of ball hoop system with different objective functions and perturbation, *Cogent Engineering*, 2018, v5, issue 1, <https://doi.org/10.1080/23311916.2018.1465328>
- [8] D. Mitić, M. D. Almawlawe, D. Antić, and M. Milojković, "An approach to design of digital sliding mode control for buck-boost converter," in *Proc. of International Symposium on Power Electronics-Ee*, 2015, pp. 1–4.
- [9] M. Lešo, J. Žilková, M. Biroš, and P. Talian, "Survey of control methods for DC-DC converters," *Acta Electrotech. Inform.*, vol. 18, no. 3, pp. 41–46, 2018.
- [10] F. Mumtaz, N. Z. Yahaya, S. T. Meraj, B. Singh, R. Kannan, and O. Ibrahim, "Review on non-isolated DC-DC converters and their control techniques for renewable energy applications," *Ain Shams Eng. J.*, vol. 12, no. 4, pp. 3747–3763, 2021.
- [11] V. Sidorov, A. Chub, and D. Vinnikov, "Performance Improvement of PWM Control Methods for Voltage Step-Down in Series Resonant DC–DC Converters," *Energies*, vol. 13, no. 17, p. 4569, 2020.
- [12] D. S. Padimiti and M. Ferdowsi, "Review of digital control techniques for automotive DC-DC converters," in *2005 IEEE Vehicle Power and Propulsion Conference*, 2005, pp. 5-pp.
- [13] J. C. Mugisha, B. Munyazikwiye, and H. R. Karimi, "Design of temperature control system using conventional PID and Intelligent Fuzzy Logic controller," in *2015 International conference on fuzzy theory and its applications (iFUZZY)*, 2015, pp. 50–55.
- [14] A. K. Gaurav and A. Kaur, "Comparison between conventional PID and fuzzy logic controller for liquid flow control: Performance evaluation of fuzzy logic and PID controller by using MATLAB/Simulink," *Int. J. Innov. Technol. Explor. Eng.*, vol. 1, no. 1, pp. 84–88, 2012.
- [15] H. Feng et al., "Robotic excavator trajectory control using an improved GA based PID controller," *Mech. Syst. Signal Process.*, vol. 105, pp. 153–168, 2018.
- [16] S. J. Bassi, M. K. Mishra, and E. E. Omizegba, "Automatic tuning of proportional-integral-derivative (PID) controller using particle swarm optimization (PSO) algorithm," *Int. J. Artif. Intell. Appl.*, vol. 2, no. 4, p. 25, 2011.
- [17] Z. Abderrahim, "A New Improved Variable Step Size MPPT Method for Photovoltaic Systems Using Grey Wolf and Whale Optimization Technique Based PID Controller," 2021
- [18] F. G. Martins, "Tuning PID controllers using the ITAE criterion," *Int. J. Eng. Educ.*, vol. 21, no. 5, p. 867, 2005.
- [19] M. Almawlawe, D. Mitić, D. Antić, and Z. Ičić, "An approach to the microcontroller-based realization of boost converter with quasi-sliding mode control," *J. Circuits, Syst. Comput.*, vol. 26, no. 07, p. 1750106, 2017.
- [20] G. Adel Aziz, S. Waley Shneen, F.n Nabeel Abdullah, D. Harith Shaker1, "Advanced optimal GWO-PID controller for DC motor", *International Journal of Advances in Applied Sciences (IJAAS)*, vol. 11, No. 3, September 2022, pp. 263–276, DOI: 10.11591/ijaas.v11.i3.pp263-276.