

A study of 14 MeV neutrons buildup factor in paraffin wax, graphite and lead.

دراسة عامل التراكم لنيوترونات ذات الطاقة 14 مليون إلكترون فولت في شمع البرافين , الكرافيت والرصاص.

د/عباس جواد السعدي
قسم الفيزياء – كلية العلوم – جامعة كربلاء

Abstract

The 14 MeV neutrons buildup factor in paraffin wax, graphite and lead have been experimentally determined using the BF_3 counter up to a thickness of 2.5 mean free path (mfp).The dependence of the secondary neutrons spectrum transmitted from all selected materials on the thickness at the fixed incident neutron energy has also been studied using a liquid organic scintillation detector type NE 213. Results indicate that, the value of buildup factor remains close to unity up to penetration depths of 0.4 mfp and then increases when sample thickness increased. The neutron spectra obtained in this research depends on the material type and thickness. In general, the neutron spectra decrease with increasing sample thickness. Comparison of the experimental results obtained with the previously calculated neutron buildup factor shows a good agreement.

الخلاصة

تم تحديد عامل التراكم لنيوترونات ذات الطاقة 14 مليون إلكترون فولت عمليا في كل من شمع البرافين , الكرافيت والرصاص وبأسمك مختلفة تصل إلى 2.5 متوسط مسار حر, باستعمال العداد BF_3 . كذلك تمت دراسة اعتماد طيف النيوترونات النافذة من العينات على سمك العينة باستخدام الكاشف ألومبيضي العضوي السائل نوع NE 213 . أظهرت النتائج الحاصلة في هذا البحث إن عامل التراكم يساوي واحد تقريبا لسمك يصل الى متوسط مسار حرمقداره 0.4 ثم يزداد بزيادة سمك المادة. كذلك وجدنا أن طيف النيوترونات النافذة من العينات تعتمد على نوع المادة وسمكها. عموما إن شدة النيوترونات الأولية النافذ من مادة الدرع تقل بزيادة سمك الدرع. النتائج العملية الحاصلة لعامل التراكم كانت متقاربة مع النتائج النظرية السابقة.

1. Introduction

It has been found that neutron generators are widely used in physical, chemical and biological researches. The attenuation of 14 MeV neutrons in various materials attracts the attention of biological, agriculture, industrial and medical researchers. The concept of buildup factor is useful to describe the attenuation of gamma rays and neutrons in shielding materials. The values of neutron buildup factors are usually determined theoretically by neutron transport calculation and Monte Carlo method [1-3]. A detailed historical review on calculation of buildup factor and its use are given by Arthur et al.[4] and Harima [5] .

Neutron attenuation is accomplished mainly through elastic and inelastic scattering reactions, which reduce the neutrons energy until they can be absorbed (captured) by the shielding materials. The neutron capture cross section is large only for thermal neutron energies. Therefore, the neutrons slowing down by scattering is important before capture.

Light elements are best for slowing down neutrons by elastic scattering . So materials with a high hydrogen content e.g. water and plastic are used. Inelastic scattering occur when the incoming neutrons impart some of their energy to the scattering material which excite the target nuclei [6, 7]. The scattered neutrons may reach the detector and get counted a part of uncollided neutrons beam. The intensity of transmitted neutrons beam (I) is represented by [4, 6]:

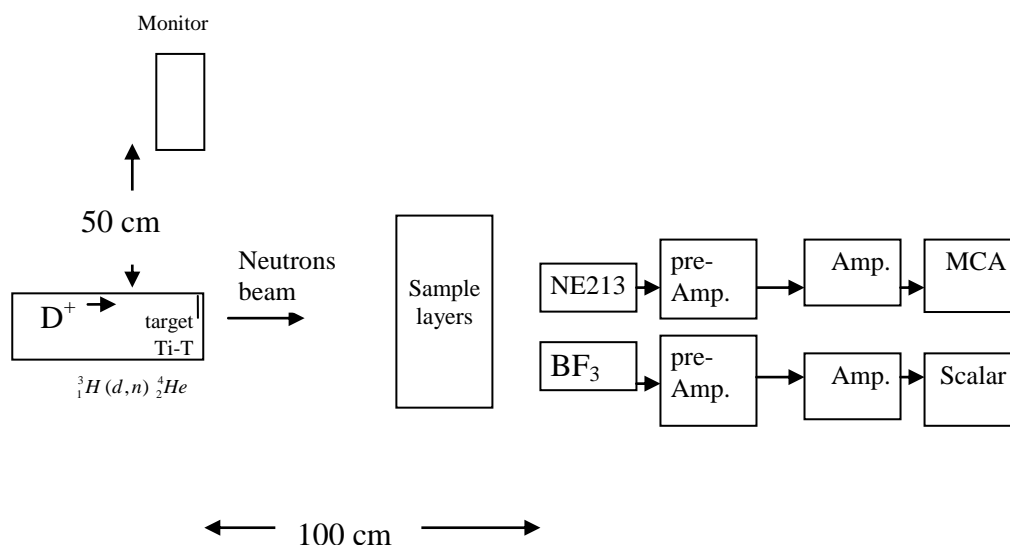


Fig. 1. Geometrical arrangement of the experimental measurements

2.2 Buildup factor measurements

The incident neutrons intensity in the absence of any sample (I_0) and transmitted ($I_{measured}$) from the sample were recorded for various thicknesses using the BF_3 counter.

The value of the $I_0 e^{-\sum_{rem} x}$ is called calculated intensity ($I_{calculated}$) was obtained by substituting

value of \sum_{rem} (0.071 cm^{-1} for paraffin wax , 0.0785 cm^{-1} for graphite and 0.088 cm^{-1} for lead) at 14 MeV neutron energy [6].

It is observed that the value of neutron buildup factor according to equation (1) is:

$$B = \frac{I_{measured}}{I_{calculated}} \quad \text{--- (2)}$$

2.3 Fast neutron energy distribution

Using neutron spectrometer, the fast neutron portion of the secondary neutrons has been measured for different thicknesses of the samples. It was then divided this region into ten groups from 1.2 MeV up to 14 MeV. The simplest multi group method was used for the evaluation of the data [9].

3. Results and discussion

The measured values of buildup factor for neutrons (B) in paraffin wax, graphite and lead for various sample thicknesses were given in table1 and plot in Fig. 2.

It can be seen that the value of buildup factor remains close to unity up to thickness of 0.4 mfp, whereas for thickness > 0.4 mfp the value of buildup factor increases with increasing sample thickness. Thus, it is obvious the multiple scattering of neutrons are produced with increase sample thickness.

It is also interested from fig.2 to note that for thicknesses > 0.4 mfp , the value of neutron buildup factor in lead is larger than that in graphite and paraffin wax. This can be explained by the effective of inelastic scattering and (n, 2n) in lead.

Fig.3 shows the comparison of experimental results with theoretical values obtained from ref.3. It can be seen that, the buildup factors in lead obtained by present work agree well with the theoretical values in most cases, except for some cases where a small disagreements is seen with the fractional difference less than 5% , this difference come from the data which have been used and the method of calculations.

Figs. (4-6) show the measured neutrons spectra distribution transmitted from investigation materials. It can be seen that the intensity of neutrons spectrum decreases with the increase of sample thickness. These spectra also show that, most of the scattered neutrons have energies below 5 MeV. This can be explained by the presence of neutron inelastic scattering reactions with the samples.

The energy group 9-14 MeV have least intensity in lead slabs. This is due to the fact that lead in this energy region have inelastic scattering cross section higher than that in graphite and paraffin wax.

4. Conclusions

The obtained results give the following conclusions:

.The value of 14 MeV neutron buildup factor for selected materials remains close to unity up to optical thickness of 0.4 mfp, whereas for optical thickness > 0.4 mfp the value of buildup factor increases with increasing sample thickness.

.The value of 14 MeV neutron buildup factor in lead is larger than that in graphite and paraffin wax.

.Most of the transmitted neutrons from selected materials have energies below 5 MeV.

Table 1. Neutron buildup factor in paraffin wax, graphite and lead for various absorber thicknesses.

Sample thickness (cm)	Paraffin wax (ρ=0.96 g. cm ⁻³)		Graphite (ρ=1.54 g. cm ⁻³)		Lead (ρ=11.34 g. cm ⁻³)	
	Optical thickness (mfp)	Buildup factor	Optical thickness (mfp)	Buildup factor	Optical thickness (mfp)	Buildup factor
2	0.142	1.020±0.001	0.157	1.023±0.002	0.176	1.053±0.006
5	0.355	1.009±0.001	0.392	1.054±0.003	0.440	1.195±0.005
10	0.710	1.207±0.002	0.785	1.162±0.005	0.880	1.526±0.007
15	1.065	1.366±0.003	1.177	1.399±0.002	1.320	1.902±0.009
20	1.420	2.013±0.004	1.570	2.233±0.005	1.760	2.612±0.013
25	1.775	2.375±0.005	1.962	2.862±0.004	2.200	3.982±0.018

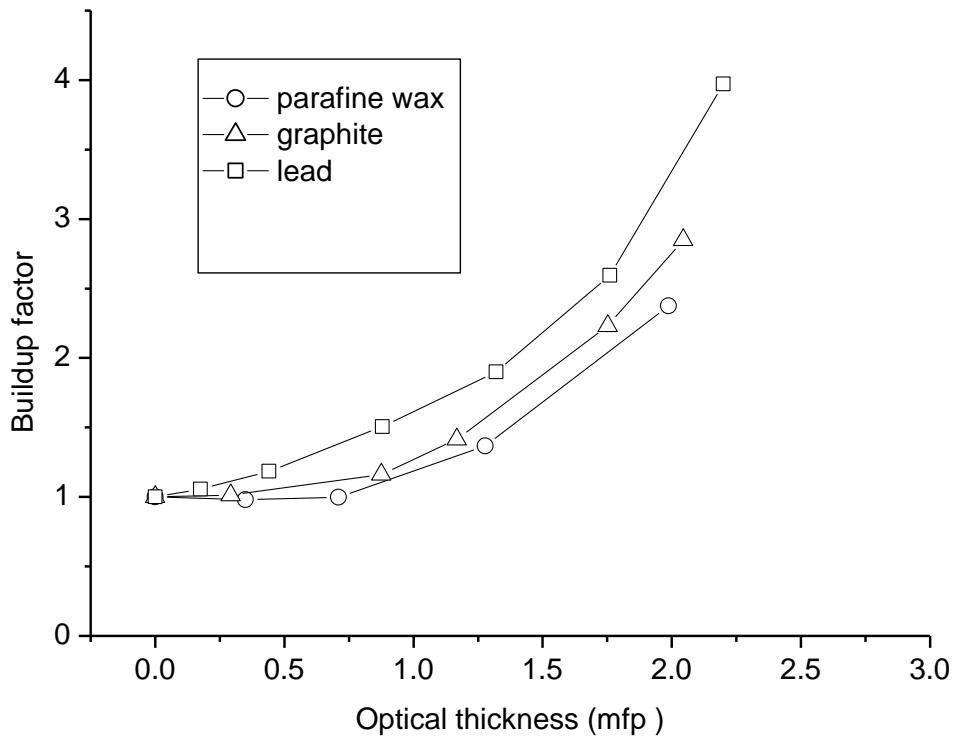


Fig.2 :Variation of 14 MeV neutron buildup factors with optical thickness in paraffin wax, graphite and lead.

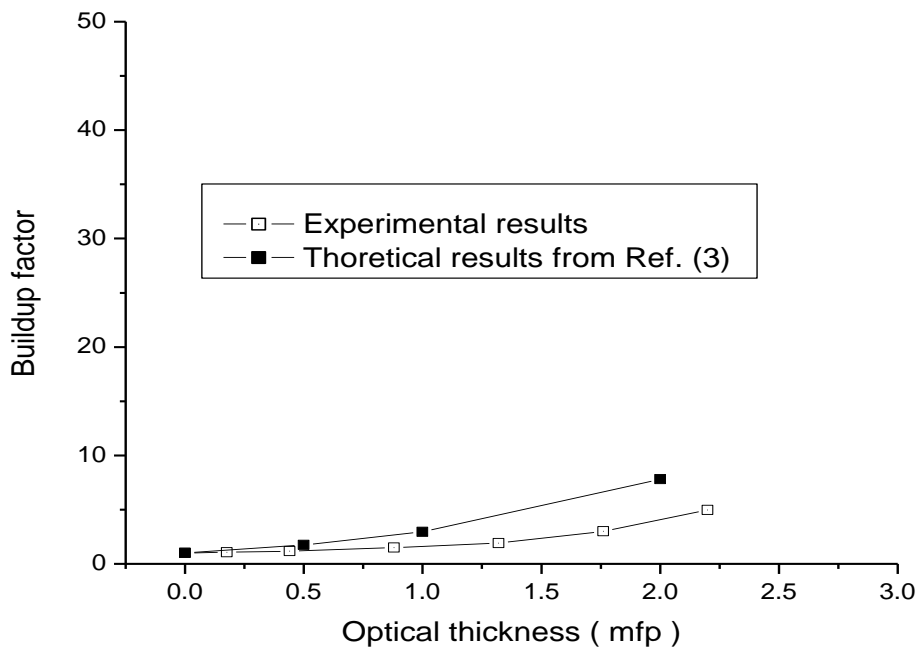


Fig.3 :Comparation of 14MeV neutron buildup factors in lead with those of reference 3 for lead.

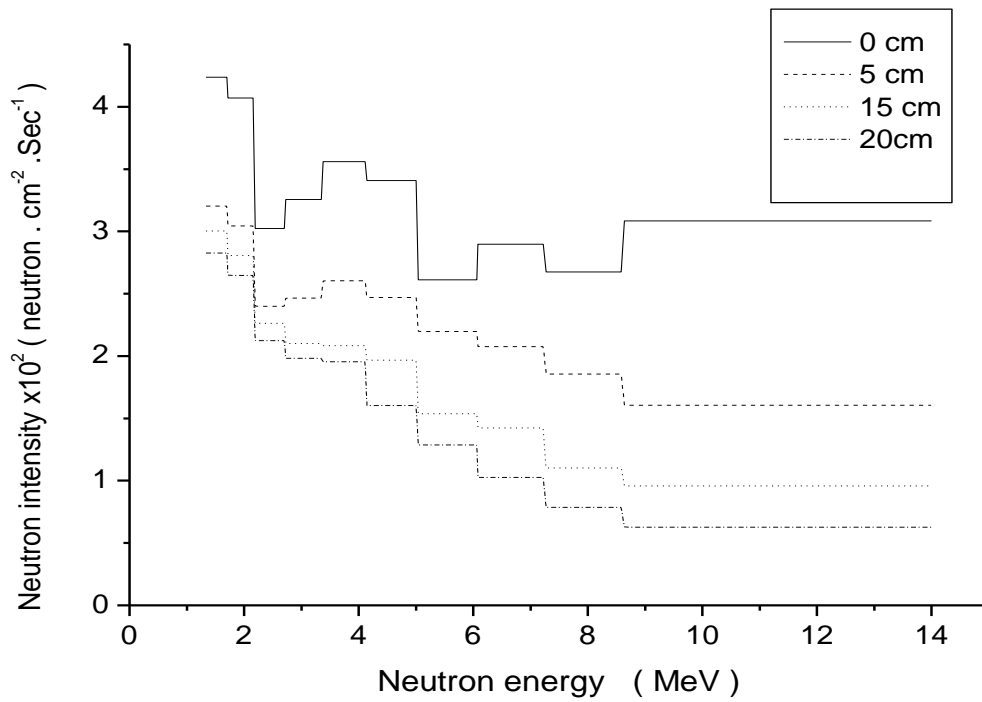


Fig. 4 : Neutron spectrum in paraffin wax for different values of layer thickness.

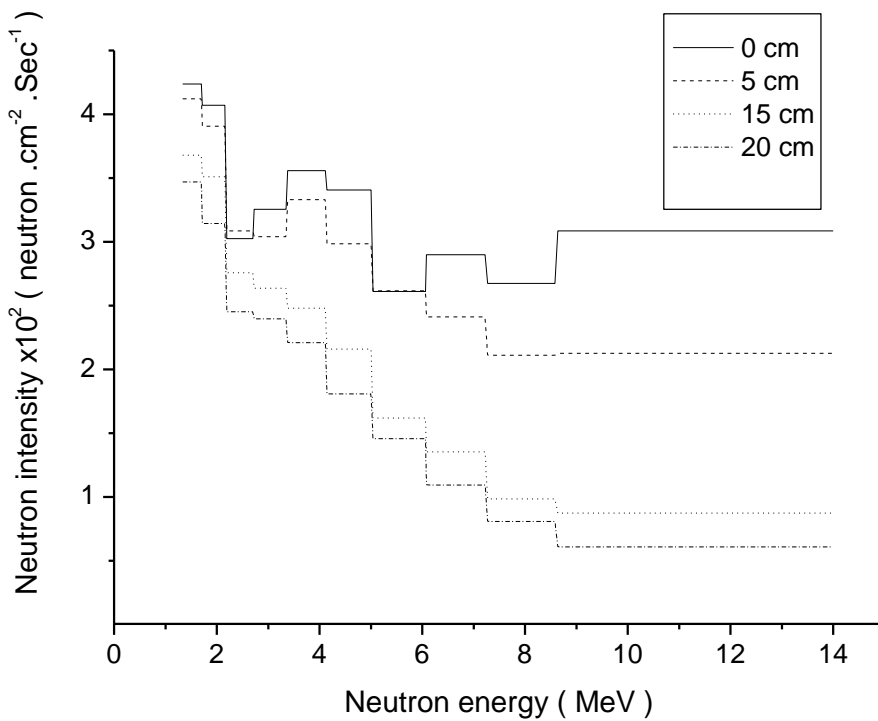


Fig. 5 : Neutron spectrum in graphite for different values of layer thickness.

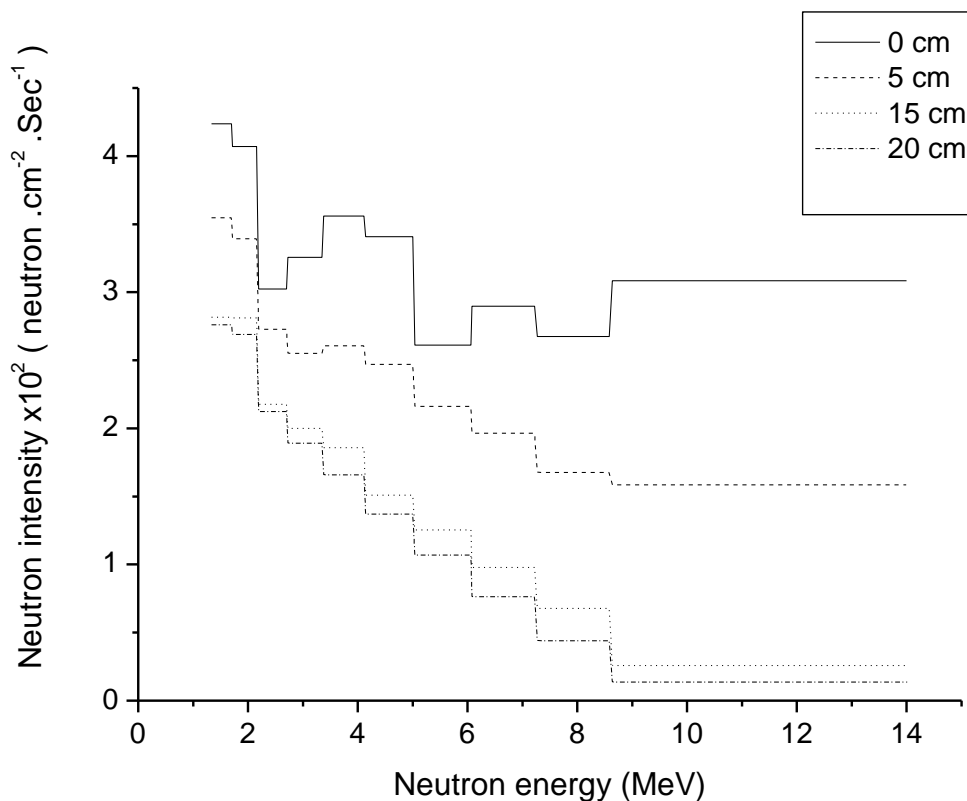


Fig. 6 : Neutron spectrum in lead for different values of layer thickness.

References

- [1] Dunn L.W., Yacout M.A. and Foghiudha F. "Gamma ray and neutron dos equivalent buildup factors for infinite slabs." Nucl. Sci. Eng., 110: 134-156 (1992).
- [2] Shin K., Kotega H., Sakamoto Y., Natane Y., Nakashima H., Tanaka S. and Tanaka S. "Point isotropic buildup factors of medium energy neutrons for concrete, iron and a double layer of iron followed by concrete" Radia. Prot. Dos." Vol.71 No.4: 269-278 (1997).
- [3] Shirani A. and Shahriari E. "Determination of neutron dose equivalent buildup factors for infinite slabs irradiated by point isotropic neutron sources using MCNP code" Journal of Sciences, Islamic Republic of Iran 18(2):177-180 (2007)
- [4] Arthur B. Chilton, Shultis J.K. and Faw R.E. "Principles Of Radiation Shielding" Prentice-Hall, Englewood Cliffs, New Jersey (1984).
- [5] Harima Y. "An historical review and current status of buildup factor calculations and applications" Radia.Phys.Chem.41:631-672 (1993).
- [6] Csikai J. "Hand Book of Neutron Generators" CRC Press, Florida (1987).
- [7] Abbas J. Al-saadi "Measurement of Removal Cross Sections Neutrons for Al, Fe and H₂O." Al-Mustansiriya J.Sci.Vol.6, No.1: 32-34(1996).
- [8] Glenn, F. Knoll "Radiation Detection and Measurement" Third Edition, John Wiley & Sons, New York (2000).
- [9] Megahid R.M., Kany M.I, El-Sayed and Kany M.S. "Spectra and fluxes attenuation of 14 MeV neutrons in iron-graphite shield" Radia.Phys.Chem.44(1-2): 109-114 (1994).