

Some Non-destructive Testing for Al metal in 0.1N of NaCl and NaOH

*Slafa I. Ibrahim**

Received 16, June, 2010

Accepted 7, March, 2010

Abstract:

In this work the corrosion behavior of Al metal was studied by using non-destructive testing (NDT), which is a noninvasive technique for determining the integrity of a material.

The ultrasonic waves was used to measure the corrosion which occur by two corrosive medium (0.1N sodium chloride and 0.1N sodium hydroxide) and study the corrosion by weight-loss method and electrochemical method in addition to performance the microscopic inspection for the samples before and after the immersion in the corrosive medium.

Corrosion parameters were interpreted in these media which involve corrosion potential (E_{corr}) and corrosion current density (i_{corr}).

The results indicate that both media was corrosive but the 0.1N NaOH was more corrosive than 0.1N NaCl.

Micro hardness test indicates that, the hardness value of the testing metal is decrease in 0.1N NaOH solution more than 0.1N NaCl solution with longest time of immersion.

Key words: corrosion, Corrosion potential, corrosion current, ultrasonic inspection, micro hardness.

Introduction:

Non-destructive testing (NDT) is a noninvasive technique for determining the integrity of a material, component or structure. Because it allows inspection without interfering with a products final use, NDT provides an excellent balance between quality control and cost-effectiveness.

The main goal of NDT is to predict or assess the performance and service life of a component or a system at various stages of manufacturing and service cycles. NDT is used for quality control of the facilities and products, and for fitness or purpose assessment to evaluate remaining operation life of plant components.

NDT inspection of industrial

equipment and engineering structures is important in power generation plants, petroleum and chemical processing industries, and transportation sector. State of the art methodology is applied to assess the current condition, fitness-for-service, and remaining life of equipment. NDT inspection provides basic data helping to develop strategic plans for extending plant life.

The major six NDT methods, which are largely used in routine services to industry, are:-visual inspection, liquid penetrate testing, magnetic particle testing, electromagnetic or eddy current testing, radiography and ultrasonic testing. [1]

* University of Technology-Energy and Fuel Research Center

Ultrasonic testing (UT) method uses high frequency sound waves to measure geometric and physical properties in materials. Ultrasounds travel in different materials at different velocities. The ultrasound wave will continue to travel through the material at a given velocity and does not return back unless it hits a reflector. Reflector is considered any boundary between two different materials, or a flaw. The ultrasound generator emits waves and in the same position receives reflected sounds (if any). Comparing both signals (emitted and reflected) the position of the defect and its size can be measured. The UT can be used on civil engineering equipments, outside metallic parts, to verify the granulation of road covering or of concrete.

Ramesh and co-workers [2] studies evaluation of stress corrosion cracks in inaccessible lattice tube weld by using ultrasonic signal analysis. S.Lebesack [3] studies guided wave ultrasonic inspection and verification studies of buried pipelines. The new rules for gas pipelines allow the use of direct assessment to evaluate the integrity of these lines. Beard, Lowe and Cawley [4] studies ultrasonic guided waves for inspection of grouted tendons and bolts. Yoseph and co-worker [5] studies nondestructive evaluation (NDE) of hidden flaws in aging aircraft structures using obliquely backscattered ultrasonic signals (OBUS).

In this work the ultrasonic waves was used to measure the corrosion which occur by two corrosive medium (0.1N NaCl and 0.1N NaOH) and study the corrosion by weigh-loss method and electrochemical method and micro hardness of the material in addition to performance the microscopic inspection for the samples before and after the immersion in the corrosive medium.

Materials and Methods:

The corrosion of pure [Al] was studied in 0.1N NaCl and 0.1N NaOH solutions. Weight loss measurements performed by immersion of (2x3cm²) pure Al in test solutions at room temperature. Ultrasonic measurement performed by measure the thickness of Al sheet before and after the immersion in test solutions by the Ultrasonic Kraut Kramer Branson (DM3) from Germany.

The measurement of corrosion behavior by using electrochemical method was performed by using Wenking M Lab Potentiostat from Bank-Elektronik (Germany) at scan rate (2mV/sec). The measure of polarization behavior was performed using glass cell with three electrodes ,working electrode (pure Al), auxiliary electrode (Pt), and reference electrode (SCE).

The performance of inspection by using BEL from Italia was used to know the change in the microstructure of aluminum before and after the solution treatment.

Micro Hardness was performed by using Digital Micro Hardness Tester HVS-1000.

Corrosion Test:

Pure Al, was cut into cylinder shape with (1.4cm) diameter, and made into electrode by pressing a copper wire into a hole on one side and then insulating all but one side with an epoxy resin. The open side was polished mechanically to a mirror finish, rinsed by distilled water and stored in desiccators. The electrochemical glass cell was of the usual type with provision for working electrode (Al), auxiliary electrode (Pt electrode), and a Luggin capillary for connection with a saturated calomel electrode (reference electrode SCE). Electrochemical measurements were performed with WINKING M Lab

Potentiostat from Bank-Elektronik at a scan rate 2 mV.sec⁻¹.

Polarization Resistance (Rp):

From the polarization curves behavior of samples it can be get the corrosion potential (E_{corr}) and corrosion current density (i_{corr}) by extrapolation method. Another parameter can be calculated from corrosion measurement which is the polarization resistance (Rp) which represents the measure of the resistance of the metal against corrosion in the immersion solution.

The polarization resistance (Rp) can be determined from Stern- Geary equation [6] :-

$$R_p = \left(\frac{dE}{di} \right)_{i=0} = \frac{b_a b_c}{2.303(b_a + b_c) i_{corr}}$$

Where E is the applied potential (Volt), i is the current density (A .cm⁻²) and b_a, b_c are anodic and cathodic Tafel slopes respectively.

Hardness:

Hardness is commonly defined as the resistance of a material to indentation by a harder material with applied load. Hardness can be quantified by depth of indentation of a hard indenter, usually diamond, and loaded perpendicular to planer surface of the material under test.

The measured hardness of any material depends on parameters associated with the test method, indenter geometry and load, Brinell, Vickers, Rockwell, etc., so that hardness is not an intrinsic bulk property, comparable to elastic modulus, yield strength or fracture toughness. In general, the measured hardness varies with applied load and the indenter shape and dimensions, but also with the microstructure and prior history of the material, the

environment, and the test temperature [7]

The Vickers hardness can be calculated by using the following equation:

$$HV = \frac{2P}{D^2} \sin \frac{\alpha}{2}$$

In this relation D is the indentation diagonal in millimeters, P is the load in kilograms and α is the angle of the pyramid, a known constant equal to 136° . With the help of a special conversion table the HV number can then be translated into different hardness scales, such as Rockwell Hardness A,B,C,etc.[8].

Ultrasonic inspection:

Ultrasonic testing method uses high frequency sound waves (2.25-30MHZ) to measure geometric and physical properties in materials.

High frequency sound waves are introduced into a material and they are reflected back from surfaces or flaws. Reflected sound energy is displayed versus time, and inspector can visualize a cross section of the specimen showing the depth of features that reflect sound.

Results and Discussion:

1- Ultrasonic inspection

Ultrasonic inspection show the different in thickness of samples before and after immersion in the experimental solutions which indicate that both media was corrosive but the 0.1N NaOH was more corrosive than 0.1N NaCl. The results of this test were show in table (1), (2) and fig. (1).


Where the aluminum corroded in the basic medium to produce (AlO₂⁻) ions according to the Bourbaix diagram while aluminum metal in neutral medium corroded unless form passive layer of Al(OH)₃, Al(OH)₃.3H₂O and Al₂O₃. Thus OH⁻ ions attack the surface faster than Cl⁻

ions and then obtain less thickness in the basic medium.



2- Corrosion behavior

Polarization experiments were started when the rate at which open circuit potential (E_{OCP}) changed was less and more 200mV.

Fig (2) and (3) show the polarization curve for pure Al in the solutions of 0.1N NaOH and 0.1N NaCl respectively. The below section of curve represent the cathodic region, where the reduction of oxygen can occur according to the following reaction:



The above sections of curve represent the anodic region where the dissolution of aluminum can occur according to the following reaction in sodium chloride solution:



But in sodium hydroxide solution:-



The rate of reaction can be calculated from the following equation [2]:

$$R_{mpy} = 0.13 \frac{i_{corr} \cdot e}{\rho}$$

Since: R_{mpy} : Rate in mil/year., i_{corr}

: Corrosion current density in $\mu\text{Amper/cm}^2$.

e : Equivalent weight., ρ : Density 2.7 gm/cm^3 for Al

The result of corrosion parameters shows that corrosion potential in sodium hydroxide solution is more negative than in sodium chloride solution. This means that the probability of corrosion in basic medium is more than in the neutral medium. Since corrosion potential is a thermodynamic parameter, while corrosion current density is a kinetic parameter. The result of (i_{corr}) in table (3) shows the highest value in basic solution.

The result of corrosion parameters and rate has shown in table (3) includes corrosion potential (E_{corr}), corrosion current density (i_{corr}) and the rate of corrosion, which indicates that the NaOH solution is more corrosive than the NaCl solution for pure Al depending on (E_{corr}), (i_{corr}), and (R_{mpy}).

3- Weight-loss measurement

The result of the change in weight of samples was shown in table (4). The variation of weight with the immersion time was shown in fig (4) for pure Al in 0.1N NaCl, and 0.1N NaOH solutions. The result of weight loss corresponding to thickness losses in ultrasonic inspection.

4- Micro hardness measurement

Micro hardness was tested in Micro Hardness Tester HVS-1000, and calculated from the following equation [9]: $Hv = 1.8544 * P/D_{av}^2$
Since :-

Hv: Vickers hardness (Kg/mm^2),
P: load projection (Kg),
 D_{av} : Diameter average.

The result of micro hardness of samples was shown in table (5), (6) which indicates that the hardness value of the testing metal decreases in 0.1N NaOH solution more than 0.1N NaCl solution with the longest time of immersion. Fig. (5), (6) show the results of this test. These results explain the corrosion that occurs in basic medium more than neutral medium.

5- Microscopic inspection

The microstructure of Al before and after the solution treatment was tested by using BEL from Italia. Fig (7) and (8) show the microscopic inspection for pure Al before immersion in NaOH and NaCl solution respectively. While fig (9) and (10) show the microscopic inspection for pure Al after immersion for (20) days in NaOH and NaCl solutions respectively.

Conclusions:

All the results can be concluded as follow:-

- 1- The ultrasonic inspection (Thickness mm) for overall(20)days take the following sequence : **Thickness(mm)** NaOH solution < NaCl solution
- 2- The corrosion potential (E_{corr}) take the following sequence with the different of medium:- E_{corr} (mV) NaOH solution > NaCl solution
- 3- The corrosion current density (i_{corr}) take the following sequence:- i_{corr} ($\mu A/cm^2$) NaOH solution > NaCl solution
- 4- The rate of corrosion (R_{mpy}) take the following sequence: R_{mpy} (mil/year) NaOH solution > NaCl solution
- 5- The weight-loss measurement show decrease in weight (g) for (20) days as shown in the following sequence: **Weight-loss (g)** NaOH solution > NaCl solution
- 6- The micro hardness of pure(Al) take the following sequence:- **Micro hardness (Hv)** NaCl solution > NaOH solution
- 7- The microscopic inspection show different microstructures of the Al metal contributed to the different corrosion behavior in the two corrosive solutions.

Table (1): The results of ultrasonic inspection for AI sample after immersion in 0.1N NaOH.

Time (day)	Thickness(mm)	Different in thickness(mm)
0 (before immersion)	1.92	---
10	1.20	0.72
20	0.80	1.12

Table (2): The results of ultrasonic inspection for AI sample after immersion in 0.1N NaCl.

Time (day)	Thickness(mm)	Different in thickness(mm)
0 (before immersion)	2.00	---
10	1.60	0.4
20	1.00	1.00

Table (3): Values of corrosion potential and corrosion current density and rate of corrosion for pure Al in NaOH and NaCl solution.

Medium	$-E_{corr}$ (mV)	i_{corr} ($\mu A/cm^2$)	R_{mpy} mil/ year
0.1M NaOH	1620.1	188.19	81.5427
0.1M NaCl	642.1	23.49	10.1782

Table (4): Results of weight-loss measurement for pure Al samples in the experimental solutions.

Medium	Time(day)	Weight(g)	Different in weight(g)
0.1M NaOH	0	0.43528	---
	10	0.32410	0.11118
	20	0.32192	0.11336
0.1M NaCl	0	0.42848	---
	10	0.42279	0.00569
	20	0.3282	0.10028

Table (5): Results of micro hardness measurement for pure Al samples in 0.1N NaCl solution.

Before immersion		After immersion for 10 days	After immersion for 20 days
L	Hv	Hv	HV
0.49N	164	160	154
4.9N	152	144	142
9.8N	135	132	131

Table (6): Results of micro hardness measurement for pure Al samples in 0.1N NaOH solution.

Before immersion		After immersion for 10 days	After immersion for 20 days
L	Hv	Hv	Hv
0.49N	164	69	63
4.9N	152	45	39
9.8N	135	Over range	Over range

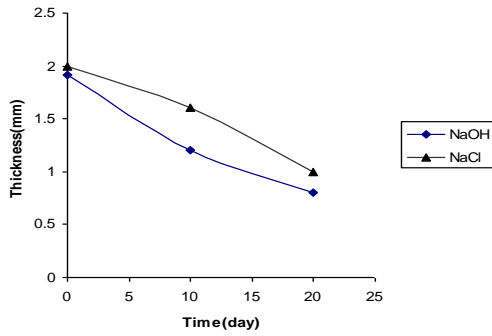


Fig (1): The variation of thickness with time for pure Al in 0.1N NaOH and 0.1N NaCl.

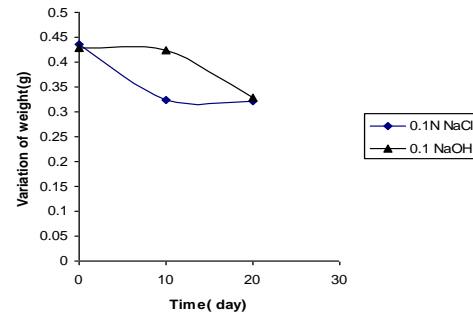


Fig (4): The variation of weight with time for immersion of pure Al sample in 0.1N NaCl and 0.1N NaOH.

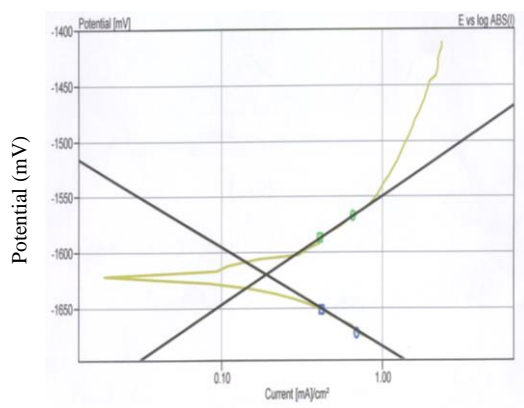


Fig (2): Polarization behavior of pure Al in 0.1N NaOH solution.

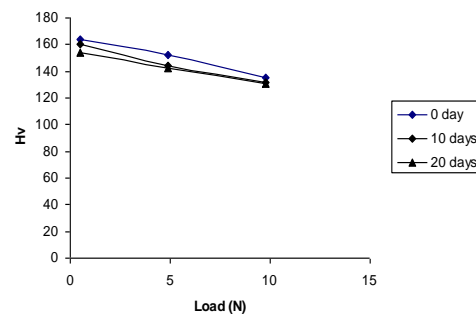


Fig (5): Effect of 0.1N NaCl solution on the Vickers hardness of pure Al.


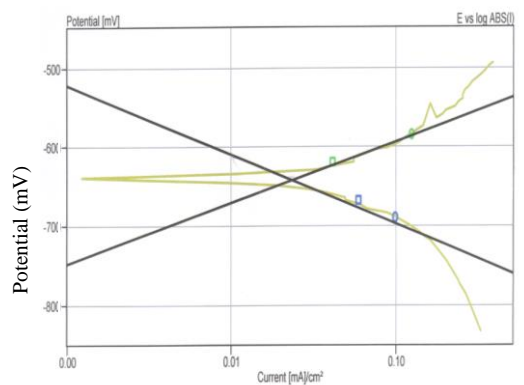


Fig (3): Polarization behavior of pure Al in 0.1N NaCl solution.

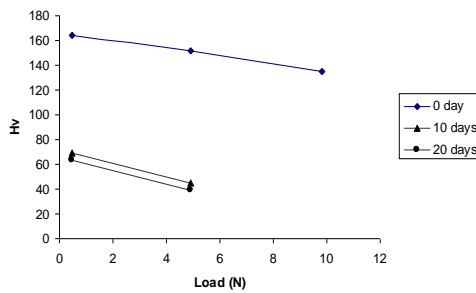

Fig(6): Effect of 0.1NaOH solution on the Vickers hardness of pure Al.

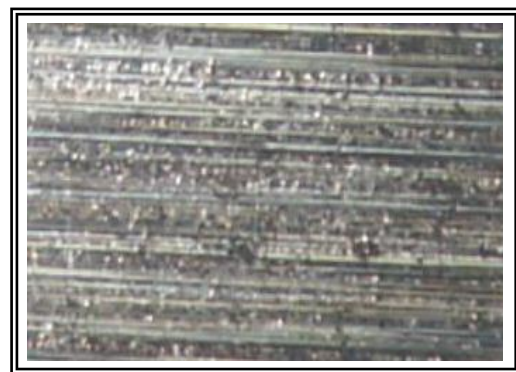


Fig (7): Microscopic inspection of pure Al before immersion in the corrosive medium 0.1N NaOH solution.

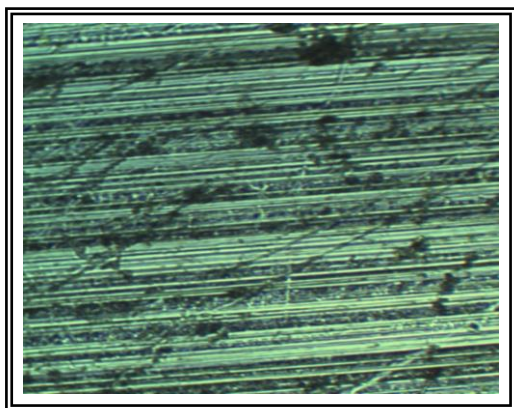


Fig (8): Microscopic inspection of pure Al before immersion in the corrosive medium 0.1N NaCl solution.

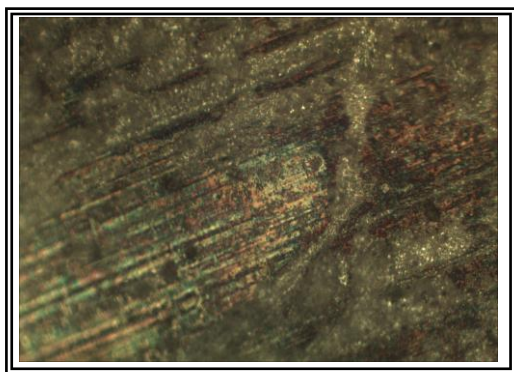


Fig (9): Microscopic inspection of pure Al after immersion in the corrosive medium 0.1N NaOH solution.

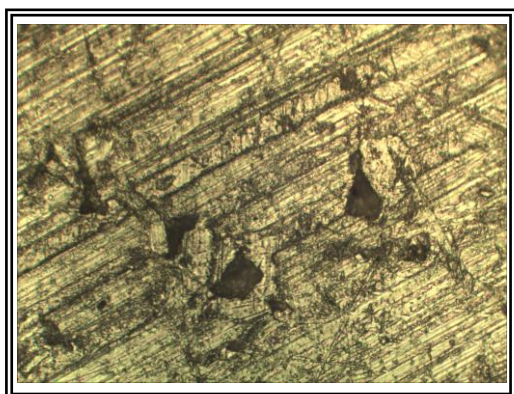


Fig. (10): Microscopic inspection of pure Al after immersion in the corrosive medium 0.1N NaCl solution

References:

1. International atomic energy agency, October 2005, Training course series No.26 .Non-destructive testing for plant life assessment, IAEA, Vienna, Austria.
2. الموسوي ،كاظم عباس. 2000. التآكل، منشورات، ELGA ،مالطا، (p281-283).
3. Ramesh, R. 1987 .Stress corrosion cracking behavior of wrought and welded austenitic stainless steels. Indian institute of technology Madras, India.
4. Lebsack, S., 2007, Guided wave ultrasonic inspection and verification studies of Buried pipelines, Lebsack & Associates, the wood lands, Texas, USA.
5. Beard M.D., Lowe M. J. and Cawley P., Journal of Materials in Civil Engineering. May-June 2003. Ultrasonic guided waves for inspection of grouted tendons and bolts. 15(3):212-218.
6. Yousef Bar-Cohen, Ajit K. Mal, and Marvin Lasswe, 2004. Mechanical and Aerospace Engineering Department, University of califimia.
7. Abdumageed M.H., 2010. Effect of different media on the corrosion behavior and some mechanical properties of Al-Zn-Mg alloy, Eng. & Tech. J.28 (3):525-536.
8. ASTM, 1988. Annual book of ASTM standards, Metals test methods and analytical procedures. American Society for Testing and Materials.03.01, USA: 909.
9. ثامر، أمين دواي. 2007. دراسة تأثير درجة حرارة المعاملات الحرارية على الخواص الميكانيكية والكلال للفولاذ الكربوني، مجلة الهندسة والتكنولوجيا، 25(8):246-235.

بعض الاختبارات غير المتلفة لمعدن الألمنيوم في محلول 0.1 عياري كلوريد الصوديوم و هيدروكسيد الصوديوم

سلافة اسماعيل ابراهيم*

* الجامعة التكنولوجية- مركز بحوث الطاقة والوقود

الخلاصة :

في هذا البحث تم دراسة السلوك التآكلي لمعدن الألمنيوم باستعمال الاختبار غير المتلف، والذي هو تقنيه غير منتهكه لتحديد كمال المادة. استخدمت في هذا البحث تقنية الموجات فوق الصوتية لقياس التآكل الذي يحدث في الأوساط الأكلة المختلفة (0.1 عياري كلوريد الصوديوم، 0.1 عياري هيدروكسيد الصوديوم). كما تمت دراسة التآكل بطريقة الفقدان بالوزن والطريقة الكهروكيميائية و اختبار الصلادة المجهرية لمعدن الألمنيوم بالإضافة الى الفحص المجهرى للعينات قبل وبعد الغمر في الوسط الأكل . كما تم تفسير متغيرات التآكل المحسوبة لهذه الأوساط والتي تتضمن جهد التآكل وكثافة تيار التآكل. تشير النتائج الى ان كلا المحلولين أكليين لكن محلول هيدروكسيد الصوديوم 0.1 عياري كان عامل تآكل أكثر من محلول كلوريد الصوديوم 0.1 عياري . وتشير فحوصات الصلاده الى ان الألمنيوم المغمور في 0.1 عياري هيدروكسيد الصوديوم تقل صلادته بمرور الزمن أكثر مما للألمنيوم المغمور في 0.1 عياري كلوريد الصوديوم .