



وزارة التعليم العالي والبحث العلمي
جامعة ميسان
كلية التربية الاساسية

Ministry of Higher Education and Scientific
Research
University of Misan
College of Basic Education

Misan Journal for Academic Studies
Humanities, social and applied sciences

مجلة ميسان للدراسات الأكاديمية العلوم الانسانية والاجتماعية والتطبيقية

ISSN (Print) 1994-697X
(Online)- 2706-722X

المجلد 23 العدد 52 كانون الاول 2024

Dec 2024 Issue 52 Vol 23



مجلة ميسان للدراسات الأكاديمية

العلوم الإنسانية والاجتماعية والتطبيقية

كلية التربية الأساسية / جامعة ميسان / العراق

Misan Journal for Academic Studies

Humanities, social and applied sciences

College of Basic Education/University of Misan/Iraq

ISSN (Print) 1994-697X (Online) 2706-722X


المجلد (23) العدد (52) كانون الاول (2024)

DEC 2024 ISSUE52 VOL 23



OJS / PKP
www.misan-jas.com

IRAQI
Academic Scientific Journals

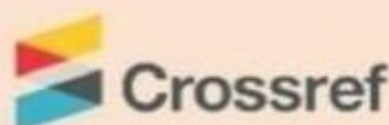

ORCID

OPEN ACCESS



journal.m.academy@uomisan.edu.iq

رقم الأيداع في دار الكتب والوثائق بغداد 1326 في 2009

الصفحة	فهرس البحوث	ت
15 – 1	The Relationship Between Periodontitis Severity and MCP-1, IL-6 Levels in Gingival Crevicular Fluid Mohammed Faisal Ali Ghada Ibrahim Taha	1
29 – 16	Organizational Reflection and Its Impact on Strategic Performance: An Analytical Research in the General Company for Electrical and Electronic Industries Ayman Abdul Sattar Jasim Aamer Fadous Azib Al-Lami	2
42 - 30	Convolutional Neural Networks in Detection of Plant Diseases Shaymaa Adnan Abdulrahman	3
57 - 43	Gestural and Facial Expression Feedback in Motivating EFL Learners to Learn Grammar Inas Kamal Yaseen	4
67 - 58	The Effect of Titanium Oxide Nanotubes on the Surface Hardness of a Three-Dimensional Printed Denture Base Material Anwr Hasan Mhaibes Ihab Nabeel Safi	5
81 - 68	Myofunctional Appliance for Class III Malocclusion: A review Maryam S. Al-Yasari Layth M. Kareem Ihab N. Safi Mustafa S. Tukmachi Zahra S. Naji	6
91 - 82	The Intertwined Trajectory between Gender and Psychic Anxiety in Chimamanda Ngozi Adichie's Americanah Tahseen Ali Mhodar Hayder Ali Abdulhasan	7
104 - 92	The Role of Digital Human Resource Management Practices in Achieving Employee Well-being: An Analytical Study within the Civil Aviation Authority Ayman Kadhum Al-Qaraghoul Ali Hasson Al-Tae Sinan Fadhel Hamad	8
113 - 105	Employing the Frontload Vocabulary Strategies in Enhancing Iraqi EFL Students' Vocabulary Retrieval Abilities Aswan Fakhir Jasim	9
122 - 114	Assessment of the surface hardness of high-impact polymethylmethacrylate following long-term dipping in clove oil solution Karrar Salah Al-Khafagi Wasmaa Sadik Mahmood	10
133 - 123	Improved Machine Learning Techniques for Precise DoS Attack Forecasting in Cloud Security Yasir Mahmood Younus Ahmed Salman Ibraheem Murteza Hanoon Tuama wahhab Muslim mashloosh	11
147 - 134	The Impact of Using Menus Strategy on the Performance of Iraqi University Students in English as a Foreign Language in Writing Composition Ansam Ali Sadeq	12
167 - 148	Attitudes of students in the Department of General Science in the College of Basic Education towards electronic tests Shaimaa Jasim Mohammed	13

188 - 168	The Systemic Heterogeneity in Adnan Al-Sayegh's Poetry – with Reference to Group (Text Dice) Abdulrahman Abdullah Ahmed	14
198 - 189	Legal Means Employed by the Iraqi and French Legislators to Deter Abuse of Office: A Comparative Study Mahdi Khaghani Isfahani Jaafar Shakir Hussein	15
208 - 199	Challenges of the social and structural identity in the Middle East (Iraq as a model) Yousif Radhi Kadhim	16
226 - 209	Evaluation of the Susceptibility of some Eggplant Varieties and the Role of Their Biochemical Compounds in Resistance to the Leafhopper <i>Amrasca biguttula</i> Fayroz T. Lafta Aqeel Alyousuf Hayat Mohammed Ridhe Mahdi	17
241 - 227	The Effect of Using Modern Technologies on the Interaction of Middle School Students in Geography Ali Fakhir Hamid	18
252 - 242	Narrative themes in the papers of Atyaf Sanidah, the novel (I may be me) as a mode Raad Huwair Suwailem	19
272 - 253	The Role of Composing the Soundtrack for the Dramatic Film (Psychopath): An Analytical Study Seerwan Mohammad Mustafa Abdulnaser Mustafa Ibrahim	20
287 - 273	The psychological connotations of poetic images in the poetry of Rahim Al-Gharabawi Salam Radi Jassim Al-Amiri Mehdi Nasser Haider Mahallati	21
311 - 288	Pedagogical Knowledge Competencies Among Students/Teachers in the Mathematics Department and Their Relationship to Professional Motivation Duha Hamel Hussei Haider Abdel Zahra Alwan	22
323 - 312	Derivatives in douaa Alahad: a semantic morphological study Zahraa shehab Ahmed	23
330 - 324	The effect of biological control agents in controlling the larval stages of <i>Spodoptera littoralis</i> in Basra Governorate Zahraa J. Khadim and Ali Zachi Abdulqader	24




...

ISSN (Print) 1994-697X
ISSN (Online) 2706-722X

DOI:

<https://doi.org/10.54633/2333-023-052-005>



The Effect of Titanium Oxide Nanotubes on the Surface Hardness of a Three-Dimensional Printed Denture Base Material

Anwr Hasan Mhaibes¹, Ihab Nabeel Safi²

Department of Prosthodontics, College of Dentistry, University of Baghdad, Baghdad, Iraq ihab.nsafi@codental.uobaghdad.edu.iq,

Anwar.Hasan2301m@codental.uobaghdad.edu.iq

ORCID ID. 0000-0002-1455-0439

Abstract:

Background: In the field of dentistry, there has been a growing prevalence of digital manufacturing technologies in recent years. Presently, the manufacturing of removable complete dentures using three-dimensional printing can be achieved through the utilization of computer-aided design and computer-aided manufacture (CAD-CAM) technology. This technology combines additive and subtractive techniques, commonly referred to as fast prototyping and three-dimensional printing, and employs PMMA professional light-curing resin as the material. The objective of this study is to assess the impact of titanium oxide nanotubes on the hardness of the underlying material utilized in 3D printed dentures. **Materials and methods:** The specimens were generated using 3D builder software developed by Microsoft Corporation, utilizing computer-aided design techniques. Specimens were designed with particular dimensions in compliance with the test standards for hardness. The denture resin 3D printed with titanium oxide nanotubes (Hwongue, China TiO₂ / D: 15-30 nm / L: 2-3 nm) was categorized into five groups (group 1 - 1% / group 2 - 1.5% / group 3 - 2% / group 4 - 2.5% / group 5 - 3%) based on weight. The specimens were printed using the Asiga max 3D printer, which utilizes digital light processing technology and is manufactured in Australia. **Results:** The average hardness values for the groups reinforced with 1% by weight of titanium oxide nanotubes showed a significant increase compared to the control group and with 1.5% showed no significant difference. In contrast, the values for the other reinforcement groups declined considerably. **Conclusion:** The hardness of denture bases made from three-dimensionally printed material was successfully increased by including titanium nanotubes at concentrations of 1% by weight.

Keywords: titanium oxide nanotube, 3D printed resin, hardness.

1.Introduction

The polymer polymethyl methacrylate (PMMA) is the material most frequently used to create traditional complete dentures. The material's relative simplicity in manufacturing, repair, biocompatibility, and aesthetic qualities have enhanced patient acceptance(yousif, 2023).

It is inexpensive, has the desired aesthetic quality and easy to process. It does not have a single desirable property, but rather a

combination of qualities that take into account its popularity and use (Zahraa, 2023).

For individuals seeking to maintain their physical and emotional well-being, it is often necessary to replace their natural teeth with artificial alternatives, such as acrylic dentures (faot, 2006). Polymeric polymers are commonly used for denture bases due to their practicality and cost-effectiveness compared to dental implants (chaldek, 2019). PMMA, also known as polymethyl methacrylate, has been widely utilized as the primary material for dentures since its inception in 1936. The colorless polymer of methyl methacrylate possesses exceptional mechanical strength, limited solubility in water, high elastic modulus, and dimensional stability, making it an excellent choice as a basis material for dentures. These items must exhibit dimensional stability under various temperature conditions and possess adequate toughness and strength to endure the pressures generated during their operation (Zarb, 2013).

Digital approaches provide the benefits of expedited denture production and a reduced number of steps in the process, resulting in decreased mistake rates. Research has shown that these new denture base resins have better mechanical qualities than traditional heat-polymerized PMMA (ALP, 2019).

The utilization of computer-aided design (CAD) and computer-aided machining (CAM) has revolutionized the procedure of fabricating removable dental prosthesis (RDPs). RDP has been produced using additive manufacturing techniques, specifically 3D printing, and the outcomes have been favorable (Srinivasan, 2020)(unkovisky, 2019).

Thanks to the progress in 3D printing technology, the dentistry sector now provides a diverse array of items. The two predominant categories of fixed prosthodontic models are derived from wax patterns and intraoral or impression scans (Chopra, 2020).

Various types of 3D printers are available. The two most popular technologies used in dentistry are digitally processed light (DLP) and liquid crystal displays (LCD). In DLP, a projector projects the 3D model's image onto the liquid polymer. The DLP printer is a faster technology that produces products with higher resolutions (Bhalero, 2018).

When compared to traditional and milled denture base materials, 3D-printed resins exhibited the lowest flexural strength and surface hardness (Prpic, 2020). However, it is approaching the ISO-recognized criterion of 65 MPa for transverse strength. Due to these constraints, the utilization of 3D-printed technology in the medical sector is now limited and is not optimal for fabricating denture bases (Totu, 2017). Prior research has examined many aspects that affect the characteristics of 3D-printed resin, including the direction of printing, the thickness of each printed layer, and the duration of the curing process. The aim of these studies was to address the aforementioned constraints and maximize the advantages offered by 3D printing technology (Reymus, 2019)(Kebler, 2021). Several research (Mangal, 2020)(Aati, 2021) focused on the incorporation of different chemicals into 3D-printed structures. Several individuals have attempted to enhance the characteristics of polymers by including nano-fillers (Tukmachi, 2020)(Mohammed, 2020). Nanofillers are highly effective fillers for acrylic resins due to their high surface free energy and large surface area. They significantly enhance the mechanical properties of the resin (Ihab, 2021)(Ihab, 2014).

Abdul Albaqi discovered that the addition of 1.5 and 2 weight percent Yttrium oxide nanoparticles greatly enhanced the binding strength between the soft liner and the denture base (Abdul Albaqi, 2022). Nevertheless, the mechanical qualities were not investigated.

Totu et al. found that the addition of TiO₂ nanoparticles enhanced the antibacterial characteristics of the 3D-printed resin. However, no experiments were conducted to assess its mechanical properties (Totu, 2017).

Mangal et al. assert that the incorporation of 0.1 weight percent animated nanodiamonds improved the mechanical properties of 3D-printed polymers, rendering them appropriate for the manufacturing of orthodontic equipment (Mangal, 2020). Similarly, Aati et al. showcased the prolonged improvement of 3D-printed polymers by using ZrO₂ nanoparticles for temporary repairs (Aati, 2021). Chen and his colleagues added two substances, silver nanoparticles and cellulose nanocrystals (CNCs), to a resin that can be printed in three dimensions. Based on their analysis, the altered resin exhibited enhanced mechanical and bactericidal characteristics (Chen, 2018).

According to Li et al., it is advised to add titanium oxide nanotubes (TiO₂) to PMMA denture base resins (Li, 2016).

Because of their large specific surface area, solid metal support contact, excellent chemical stability, and catalytic activity, they improve PMMA's mechanical characteristics.

As far as the authors are aware, there has been no prior investigation on the effects of resin printed in three dimensions on TiO₂ nanotubes with regards to hardness. The present study examined the impact of including TiO₂ into three-dimensional resin printing. The original null hypothesis proposed that the hardness of the denture base resin, when combined with TiO₂ nanotubes, would not undergo any changes.

2. Materials and Methods

2.1 Study design:

The denture base resin (Dentbase/Asiga, Australia) was subjected to testing using titanium oxide nanotubes (D: 15-30 nm/L: 2-3 nm) sourced from Hongwu, China. The nanotubes were treated in varying quantities of 1%, 1.5%, 2%, 2.5%, and 3% by weight. The results were compared to those of the control group, which did not receive any titanium oxide nanotubes. The study involved conducting tests on the hardness of specimens prepared with different percentages (1%, 1.5%, 2%, 2.5%, and 3% wt.) of TiO₂ nanotubes mixed with resin. A total of 60 specimens were prepared for this study, including one control specimen made of pure resin and five specimens for each TiO₂ nanotube percentage. There are ten specimens in each category for testing.

2.2 Samples preparation:

The specimens depicted in figure 1-A were digitally generated using an open-source software called 3D Builder, developed by Microsoft Corporation. The specimens were fabricated to meet the prescribed specifications for surface hardness testing, which are 65 mm x 10 mm x 2.5 mm, as outlined in ADA No. 12 standard (1999). Once the design is finished, the STL file is submitted and uploaded to the Asiga Composer program, which is used to export the file as an STL. This exported file, shown in figure 1-B, is then sent to the printer for printing, as shown in figure 1-B.

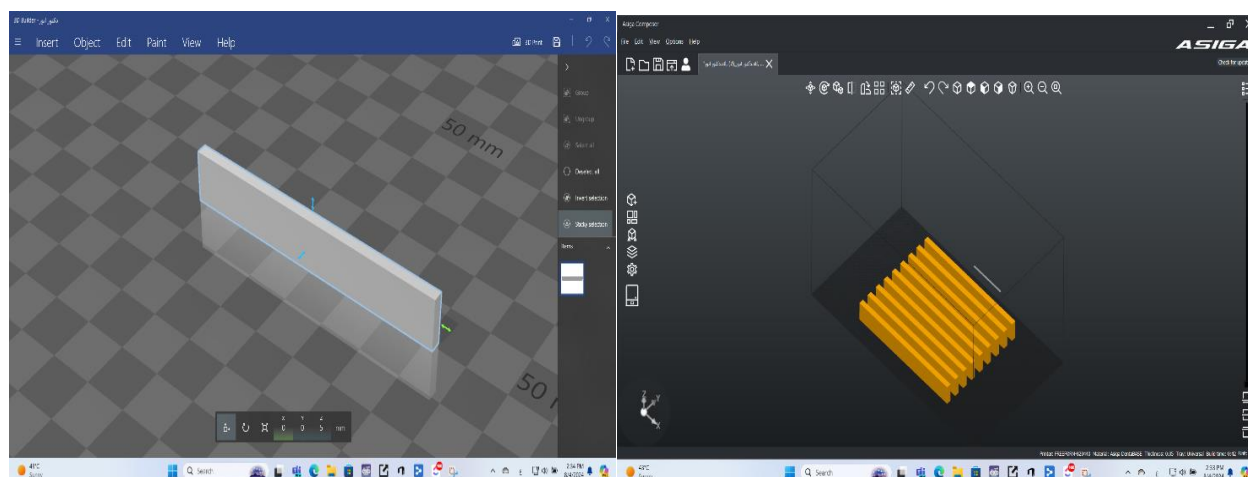


Fig 1: A) 3D builder software, B) Asiga composer software.

2.3 The titanium nanotubes incorporation:

Color pigments, which are one of the components of resin, tend to settle in the bottom of the bottle. As a result, it will cure unevenly, and the prints may fail. It is imperative to vigorously shake the resin bottle for 30 to 60 seconds, as advised by the manufacturer, prior to introducing the resin to the resin vat. In order to achieve a uniform blend of printed denture base resin, an exclusive shaker (Mazic D mixer/ ackureta, Taiwan) was initially employed. Subsequently, a total of 3 milliliters of ethyl alcohol with a purity of 99.9% were combined with titanium nanotubes sourced from Hongwu, China. This mixture was then subjected to ultrasonic treatment using an MSE soniprep 150 probe from the Netherlands for a duration of three minutes. The purpose of this process was to produce a nanotube suspension that would yield improved outcomes when combined with resin due to its elevated viscosity.

The denture base resin was combined with a suspension of titanium oxide nanotubes in a dark amber glass container. The container was left open for a short period of time to allow the alcohol to evaporate, and then it was closed to prevent exposure to surrounding light. The alfa HS-860 magnetic stirrer from Iran was employed to produce a nanocomposite for printing denture base resin. During the process, TiO₂ was gradually incorporated into the resin solution while being constantly stirred in the magnetic stirrer for 30 minutes at a temperature of 60°C. This stirring action was done to decrease the viscosity of the mixture. Subsequently, the mixture was stirred for a duration of 8 hours at ambient temperature (25 °C).

Nanotubes are elongated, cylindrical structures with a central hollow cavity. The walls of titanium nanotubes are always composed of layers, which might range from two to ten. The tubular shape and multilayered structure of Titania improve the contact at the interface, resulting in an increased surface area-to-volume ratio of the material.

The presence of reinforced fillers in the PMMA resin has led to enhanced interaction with TiO₂ nanotubes, resulting in an increased quantity of the nanotubes (Bavykin, 2010).

2.4 Printing of 3-dimensional specimen blocks (3-D model)

The 3D-printer (DLP) technology from Asiga in Australia was used to print the specimens while maintaining the following settings according to manufacturer instructions: heater temperature = 30, light intensity = 19, offset = 0.09, xy scale = 1.007, separation pressure limit = 300 g/cm², separation velocity = 4.3 mm/s, and slice thickness = 0.05.

Once the printer vat was filled with the liquid polymer mixture, which consisted of resin with titanium nanotube filler, the lid was closed in order to prevent the mixture from being exposed to room light. As the plate is lowered, the liquid polymer mixture solidifies due to the presence of light. This process continues till the 3D model is finished. After the sculpture has hardened, the liquid in the container is removed to expose it. The printing was carried out with precision using a layer thickness of 50 μ m. The process of printing 20 specimens can be completed in around 35 minutes.

2.5 Cleaning, drying, and curing

The sample was meticulously removed from the 3D printer platform using a precise blade. Following a three-minute ultrasonic cleaning using Clean I from Ackureta in Taiwan, the printed specimens were further cleaned for two minutes using 99.9% isopropyl alcohol from Scharlau in Spain to eliminate any residual uncured resin. The specimens were dried thoroughly and then subjected to polymerization using a light-curing method in a UV box from Ackureta, Taiwan. The process involved exposing the specimens to light at a wavelength of 405 nm for five minutes on each side, following the manufacturer's guidelines. Subsequently, a German-made acrylic bur and lathe polishing equipment were employed to finalize and refine the specimen. In order to determine the accurate dimensions, the specimens were measured using a digital vernier caliper manufactured by Kirti NDT/India. Commencement of testing might be initiated with the prepared specimens.

2.6 Surface hardness test (Shore D)

The example was manufactured in accordance with ADA standard No. 12 (1999) and has dimensions of 65 mm x 10 mm x 2.5 mm. The hardness of the acrylic resins was assessed using the Time Group Inc./China hardness testing machine. The apparatus had a blunt-pointed indenter with a diameter of 0.8 mm that gradually increased to 1.6 mm. A digital scale, ranging from 0 to 100 units, was connected to the indenter. The indenter was rapidly and forcefully driven downward. Measurements were obtained directly from the digital scale's display.

2.7 Statistical analysis method

Data analysis was conducted using the statistical software SPSS (Statistical Package for Social Science, version 21) and Prism 9 (GraphPad Software, USA). The results are presented in the form of bar charts, which show the average values and the variability of the data, serving the goal of descriptive analysis. The P values indicating non-significant, significant, and highly significant differences were greater than 0.05, less than 0.05, and less than 0.01, respectively.

3.Result and discussion

3.1Test of hardness

The addition of TiO₂ significantly increased the hardness of 3D-printed resin, and the highest value was recorded with TiO₂ 1%% and 2% (87.7%), which exceeded the control hardness value (85.9%). At 1.5%, there was no significant increase in comparison to the control group. When TiO₂ increased by more than 2.5%, it showed a significant decrease in .hardness, as shown in table 1 and Fig. 6

Table 1: Descriptive Data of Shore D hardness test

Groups	Mean	±SD	±SE	Minimum	Maximum
Control	82.540	1.800	0.569	80.700	84.700
1%	86.580	0.716	0.226	85.700	87.800
1.5%	85.000	0.917	0.290	84.100	86.600

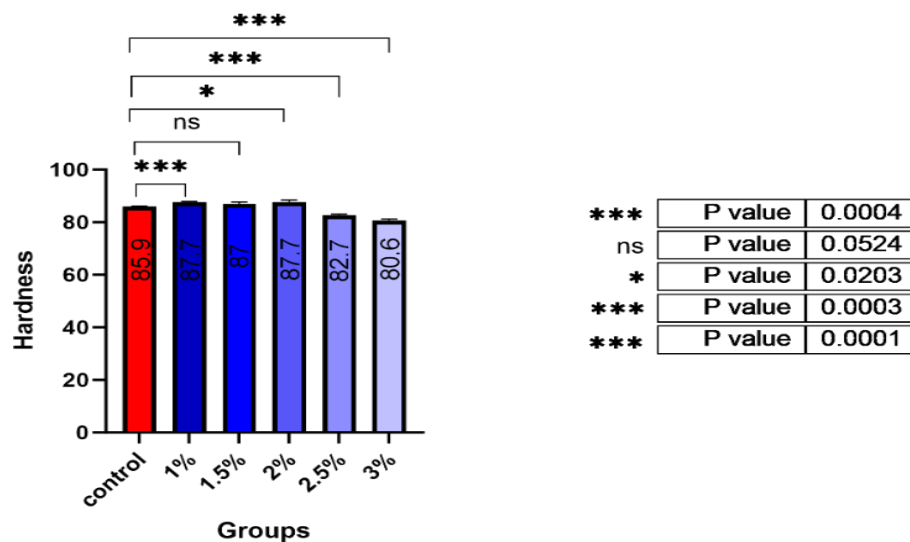


Fig 2: Hardness test results

4.Discussion

This study evaluated the hardness of the denture base material produced using 3D printing technology after including titanium oxide nanotubes.

The mechanical properties of 3D-printed resin are influenced by the orientation, curing procedure, and building parameters (Lin, 2020). Software, layer thickness, layer number, and layer shrinkage are all important factors (Kown, 2021). The printing settings for the manufacturer are usually determined, save for the layer height (thickness) and printing orientation, which are fixed and cannot be altered. Within the range of 25 to 200 µm (Revilla, 2019), a layer thickness of 100 Mm is deemed sufficient. The printing process in this investigation utilized a layer thickness of 50 µm. Decreasing the layer thickness of a 3D-printed object enhances its robustness by facilitating better resin drying and minimizing dimensional variations (Kessler, 2020). Moreover, using thinner layers in printing allows

for more precise capture of geometric details. However, it is important to note that these benefits are accompanied with increased costs and a larger likelihood of print errors (Kessler, 2020).

The DLP printer was chosen for this study due to its superior speed and ability to manufacture objects with a greater resolution (Bhalero, 2018). DLP technology differs from stereolithography in that it uses patterned laser light to cure all layers at once, rather than scanning each area sequentially with the laser. Due to this advantage, the duration of building is unaffected by the quantity of items or the shape of the corresponding layer (Gad, 2021).

Scientists have achieved the identification and production of nanomaterials in the form of nanotubes due to their exceptional properties, enabling them to function highly effectively in various applications.

Denture bases fabricated using 3D-printed materials represent a novel approach to denture production, albeit with inferior mechanical and physical characteristics compared to conventional denture bases (Gad, 2021).

Titanium dioxide (TiO_2) nanotubes possess a very large surface area, a robust interaction with metal supports, exceptional chemical stability, elevated catalytic activity, and outstanding performance in both acidic and alkaline conditions. This attribute renders them advantageous in numerous circumstances.

Hardness is the measure of a material's ability to withstand deformation caused by mechanical indentation or abrasion. Plaque buildup and staining can occur as a result of mechanical denture cleaning (Aati, 2021). The decrease in hardness can be attributed to various factors such as the type of material, the printing layers, and water absorption at high temperature circumstances.

Figure 2 displayed the hardness values. Out of all the other groups, the titanium oxide nanotube exhibited the greatest average proportion, which was 1%.

This finding is consistent with (Porras, 2016). The study discovered that incorporating 0.25 wt.% and 0.5 wt.% of SiO_2 nanoparticles into Next Dent 3D printed resin resulted in an enhancement in the hardness of the materials. This improvement was observed when the samples were printed at a 90° angle and with a layer thickness of $50\ \mu\text{m}$, which aligns with the findings of a previous study (Alshaikh, 2013). Also is consistent with (Shahad.,2024) which found that surface hardness values of acrylic increased after addition of Zirconia/Chitosan filler. Conversely, the study discovered that including ZrO_2 NPs into NextDent and ASIGA 3D-printed resins led to a minor reduction in hardness, in contrast to the unmodified resin.

With the increasing popularity of digitally manufactured dentures, this study highlights the importance of further research on the mechanical properties of the new denture base made from 3D materials. It also emphasizes the need for comparisons between different printing and brand combinations of technologies under conditions that closely resemble the oral environment. The mechanical and physical qualities of 3D-printed denture bases are inferior, despite the intuitive notion of comparing materials based on their

fabrication techniques. To optimize the advantages of digital manufacturing, it is recommended to enhance the resin used for printing by modifying its composition or reinforcing it. Further investigation is required in these domains as they are thought to have a significant influence on the optimal printing alignment, the time of curing and post-curing, the thickness of printing layers, the method of polishing, and the storage of specimens for 3D-printed resin. The statistical analysis revealed variations in surface hardness between the study groups, resulting in the null hypothesis being rejected, which postulated that the 3D-printed denture base resin's characteristics would remain unchanged upon the incorporation of TiO₂ nanotubes.

Several factors served as constraints for this investigation. As a result of insufficient past study in this field, we did not select the percentages and qualities of nanotubes in the most optimal manner. It is advisable to modify the surfaces of titanium oxide nanotubes in order to enhance interactions at the interface between titanium nanotubes and the denture base polymer matrix. Further investigation is necessary to ascertain the optimal concentration of titanium nanotubes required to attain the desired biological characteristics in denture base resins, including antibacterial properties and biocompatibility.

4. Conclusions

The incorporation of titanium oxide nanotubes into the basic material for 3D-printed dentures was successfully achieved. Nanotubes were incorporated to enhance the hardness of the acrylic resin. The extent of these enhancements was directly related to the quantity of additional titanium oxide nanotubes included. Furthermore, the preliminary inquiry has uncovered a possibly valuable new compound for enhancing the foundational resin material utilized in 3D-printed dentures.

5. References

1. Yousif Waleed Abd Alrazaq, Bayan Saleem Khalaf. Bond strength of 3d printed acrylic resin with silicone soft liner after ethyl acetate surface treatment (A Review of Literature). *misan journal of academic studies*. 2023; (22):48. <https://doi.org/10.54633/2333-022-048-016>
2. Zahraa Abdulwahab Abdulrazzaq, Bayan S. Khalaf. Natural Fibers Reinforcement of Denture base materials: Natural Wool Reinforcement (A Review of Literature). *misan journal of academic studies*. 2023; (22):47. <https://doi.org/10.54633/2333-022-047-027>.
3. Faot F, Costa MA, Cury ADB, Garcia RCR. Impact strength and fracture morphology of denture acrylic resins. *J. Prosthet. Dent.* 2006; 96:367–37. DOI: 10.1016/j.prosdent.2006.08.001
4. Chladek, G. Pakiela, K. Pakiela, W. Zmudzki, J. Adamiak, M. Krawczyk, C. Effect of antibacterial silver-releasing filler on the physicochemical properties of poly(methyl methacrylate) denture base material. *Materials*. 2019; 12:41-46. <https://doi.org/10.3390/ma12244146>
5. Zarb GA, Fenton AH. *Prosthodontic treatment for edentulous patients*. 13th ed. St. Louis: Mosby/Elsevier; p 133, 136, 140
6. ALP, Gülce; MURAT, Sema; YILMAZ, Burak. Comparison of Flexural Strength of Different CAD/CAM PMMA-Based Polymers. *J. Prosthodont.* 2019; 28: 491–495. DOI: 10.1111/jopr.12755
7. Srinivasan M., Kalberer N., Naharro M., Marchand L., Lee H., Müller F. CAD-CAM milled dentures: The Geneva protocols for digital dentures. *Prosthet. Dent.* 2020; 123: 27–37.

- DOI:10.1016/j.prosdent.2018.12.008
8. Unkovskiy A.,Wahl, E.,Zander, A.T.,Huettig, F.,Spintzyk, S. Intraoral scanning to fabricate complete dentures with functional borders: A proof-of-concept case report.BMC Oral Health.2019;19:46.DOI: 10.1186/s12903-019-0733-5
 9. Chopra, S., Bansal, P., & Bansal. J Adv Med Dent Scie Res.2020; 8(1):184–186.
 10. Bhalerao, K. Adaptations of 3D Printing Technology to Microfluidics Systems for the Detection of Multi-Protein Cancer Biomarkers.2018.
 11. Prpic V, Schauerl Z, ´ Cati ´ c A, et al. Comparison of mechanical ´ properties of 3D-printed, CAD/CAM, and conventional denture base materials. J Prosthodont.2020 ;29:524-528. DOI: 10.1111/jopr.13175
 12. International Organization for Standardization (ISO). Dentistry – base polymers – Part 1: Denture base polymers. ISO 20795-1
 13. Totu EE, Nechifor AC, Nechifor G, et al. Poly(methyl methacrylate) with TiO₂ nanoparticles inclusion for stereolithographic complete denture manufacturing—the future in dental care for elderly edentulous patients.J Dent.2017;59:68-77. DOI: 10.1016/j.jdent.2017.02.012
 14. Reymus M, Lmkemann N, Stawarczyk.3D-printed material for temporary restorations: impact of print layer thickness and post- curing method on degree of conversion.Int J Comput Dent.2019;22:231-237. PMID: 31463487
 15. KEßLER A, Hickel R, Ilie N. In vitro investigation of the influence of printing direction on the flexural strength, flexural modulus and fractographic analysis of 3D-printed temporary materials.Dent Mater J.2021;40:641-649. DOI: 10.4012/dmj.2020-147
 16. Mangal U, Seo JY, Yu J, et al. Incorporating aminated nanodiamonds to improve the mechanical properties of 3D-printed resin- based biomedical appliances.Nanomaterials (Basel).2020;26(10):827. DOI: 10.3390/nano10050827
 17. Aati S, Akram Z, Ngo H, et al. Development of 3D printed resin reinforced with modified ZrO₂ nanoparticles for long-term provisional dental restorations.Dent Mater.2021;37:360-374. DOI: 10.1016/j.dental.2021.02.010
 18. M.S. Tukmachi, I.N. Safi and Mohammed Moudhaffer M. Ali. Evaluation of mechanical properties and cytotoxicity of maxillofacial silicone material after incorporation of zirconia nanopowder.Materials Today.2021;42:2209–2217. DOI:10.1016/J.MATPR.2020.12.306
 19. D.H. Mohammed, M.S. Tukmachi and I.N. Safi.Characterizations and testing some mechanical properties of prepared PMMA- Lithium disilicate glass ceramic composite for denture base application.Materials Today.2021;42:2482–248. DOI:10.1016/J.MATPR.2020.12.567
 20. Ihab N.S, Hassanen K.A, Ali N.A. Assessment of zirconium oxide nano-fillers incorporation and silanation on impact, tensile strength and color alteration of heat polymerized acrylic resin.J Bagh College Dentistry.2021; 24(2) . DOI:10.0001/1354
 21. Ihab N. Safi.Evaluation the effect of nano-fillers (TiO₂, AL₂O₃, SiO₂) addition on glass transition temperature, E-Moudulus and coefficient of thermal expansion of acrylic denture base material.J Bagh College Dentistry.2014; 26(1). DOI:10.12816/0015162
 22. ABDUL-BAQI, Hikmat J., et al. Investigating Tensile Bonding and Other Properties of Yttrium Oxide Nanoparticles Impregnated Heat-Cured Soft-Denture Lining Composite In Vitro.,Journal of

- International Society of Preventive and Community Dentistry.2022; 12(1): 93-99. DOI:10.4103/jispcd.JISPCD_274_21.
23. Chen S, Yang J, Jia YG, et al: A study of 3D-printable reinforced composite resin: PMMA modified with silver nanoparticles loaded cellulose nanocrystal. Materials (Basel) 2018;11:24-44. DOI: 10.3390/ma11122444
24. Li T, Luo S, Luo Y, Yang L. Ag/AgI nanoparticles decorated WO₃/TiO₂ nanotubes with enhanced visible light photocatalytic activity. Mater Lett.2016;180:130–4. <https://doi.org/10.1016/j.matlet.2016.05.082>
25. Bavykin DV, Walsh FC. Titanate and titania nanotubes: Synthesis, properties and applications. 1st ed., Cambridge, UK: Royal Society of Chemistry, (RCS Nanoscience & Nanotechnology). 2010.
26. Lin CH, Lin YM, Lai YL, et al. Mechanical properties, accuracy, and cytotoxicity of UVpolymerized 3D printing resins composed of Bis-EMA, UDMA, and TEGDMA.J Prosthet Dent.2020;123:349-354. DOI: 10.1016/j.prosdent.2019.05.002
27. Kwon JS, Kim JY, Mangal U, et al.Durable oral biofilm resistance of 3d-printed dental base polymers containing zwitterionic materials.Int J Mol Sci.2021;22:E417. DOI: 10.3390/ijms22010417
28. Revilla-León M, Özcan M. Additive manufacturing technologies used for processing polymers: current status and potential application in prosthetic dentistry.J Prosthodont.2019;28:146-158. DOI: 10.1111/jopr.12801
29. Kessler, A., Hickel, R., Reymus, M. 3D printing in dentistry-state of the art. Operat.Dent.2020; 45:30–40.DOI: 10.2341/18-229-L
30. Gad, M.M.; Fouda, S.M.; Abualsaud, R.; Alshahrani, F.A.; Al-Thobity, A.M.; Khan, S.Q et al.Strength and Surface Properties of a 3D-Printed Denture Base Polymer.J. Prosthodont.2021; 31:412–418. DOI:10.1111/jopr.13413
31. Porras R, Bavykin DV, Zekonyte J, Walsh FC, Wood RJ. titanate nanotubes for reinforcement of a poly(ethylene oxide)/chitosan polymer matrix. Nanotechnology 2016;27: 195706.
32. Alshaikh, A. A., Khattar, A., Almindil, I. A., Alsaif, M. H., Akhtar, S., Khan, S. Q., & Gad, M. M. 3D-printed nanocomposite denture-base resins: effect of ZrO₂ nanoparticles on the mechanical and surface properties in vitro. Nanomaterials.2022; 12(14): 2451.Prosthodont Res.2013;57:288-293. DOI: 10.1016/j.jpor.2013.08.004
33. Shahad Lateef Mohammed, Firas Abdulameer Farhan. Effect of Addition Zirconia/Chitosan Filler on Mechanical Properties of Heat Cure Polymethyl Methacrylate Resin.misan journal of academic studies.2024;(23):50. DOI:<https://doi.org/10.54633/2333-023-050-002>