

Prediction of Surface Roughness In Ceramic Cutting Tool Using SPSS Model

Dr.Saad Kariem Shather 

Received on:25/1/2009

Accepted on:3/9/2009

Abstract

The aim of this study is to predict surface roughness of workpiece which machined by ceramic cutting tool using SPSS program and compare the results with the experimental values which performed under different cutting conditions. Cutting speed (60,80, 90,100,110 m/min) and feed rate (0.1, 0.08, 0.3, mm/rev) and depth of cut (0.25, 0.5 ,0.7mm) . Experiments were conducted to predict the surface roughness of workpiece , the estimated result shows that there is good agreement between average experiments values such as Ra (1.27,0.92) and predicted values of Ra (1.2024, 0.8254) and Ra (2.15) also value (2.2774) and experimental values of Ra (2.51, 1.78).

Keywords: ceramic cutting tool, surface roughness, mechanical machining.

التنبؤ بالخشونة السطحية لعدة القطع السيراميكية باستخدام SPSS موديل

الخلاصة

أن الهدف من هذه الدراسة هو تخمين خشونة السطح للمشغولة التي يتم تشغيلها باستخدام عدة القطع السيراميكية وباستخدام برنامج (SPSS) ومن ثم مقارنة النتائج مع التجارب العملية والتي تنتج عند ظروف قطع مختلفة من سرعة قطع تتضمن (60, 80, 90, 100, 110) متر/ دقيقة ومعدل تغذية يتراوح (0.1, 0.08, 0.3) ملم/دورة مع عمق قطع (0.25, 0.5, 0.7) ملم والننتيجة أدت الى التقارب أو التوافق ما بين العملي والتخمين لقيم الخشونة عند القيم (0.7, 1, 2.024) كذلك الخشونة (2.15) والقيمة (2.2774) مع قيم الخشونة التي تم قياسها وهي (1.78 , 2.51).

1-Introduction

Metal cutting is one of most important manufacturing processes in the area of material removal (Chen&smith,1977) , black (1979) define metal cutting as the removal of chip from a workpiece in order to obtain a finished product with desired attributes of size, and surface roughness , Tonshoff et al, (1975) studied the effect of tool composition and tool wear on surface integrity in hard turning of case hardened ASTM 5115 Steel so roughness has been one of most important quality measure in many mechanical products [1,2,3] ceramic are mostly compressed and sintered aluminum oxide powder with sometimes the addition of small amount of other metallic oxide. This type of material is harder than most others, retains its hardness and strength up to 1750 C° and has a low coefficient of heat conductivity and a low coefficient of friction . Alumina – based ceramic were introduced as cutting insert during world war II , and were for many years considered too brittle for regular machine –shop use , improved machine tools and finer-grain , tougher compositions incorporation zirconia or silicon carbide .[4,5]. One of the most effective ceramic cutting tool materials developed in U.K is Syalon (from silicon- aluminium-oxide). The material combines high strength with hot hardness, shock resistance and other properties. Syalon cutting inserts are made by Kennametal and Sandvik and sold as kyon 2000 then most ceramics used for machining are still based on

high purity, fine grained alumina(alumina oxide), , (Abburi&Dixil 2006) developing the knowledge based system for prediction surface roughness in turning process but employ property , this study concentrated on developing the regression program to predict surface roughness for carbon steel using ceramic cutting tool under various cutting condition. tool parameters such as tool material , tool coating, and tool geometry design (edge preparation, rake angle, etc) need to be appropriately chosen for different operations (roughing-semi roughing or finishing) the optimal performance of cutting tool requires.[6]

2-Theoretical procedure:

Although very large numbers of useful ceramic materials are now available, only a few combinations have been found to combine such properties as minimum porosity , hardness , wear resistance , chemical stability , and resistance to shock to the extent necessary for cutting tool inserts , materials based on alumina are widely used moderate amounts of other compounds, eg magnesium oxide, and calcium oxide , are added to form a glassy phase [7,8,9] .

Engineering ceramics are oxide , nitrides ,borides, and silicates, such materials are widely use in engineering for such items as furnace components , tool tips and grinding tools, [10,11,12] then table (3) gives data on the properties of ceramic a statical model was created by regression function in **SPSS** to predict surface roughness which

introduce when used ceramic cutting tool . the regression coefficient predict based on the uncode d original factor values the magnitudes of the regression coefficient are not compatible either.this is why it is usually more unformative to look at the **ANOVA** parameter predict, however ,the regression coefficient can be useful when making predictons for the dependent variable based on the original metric of the factors. **ANOVA** (Analysis of variance) , a numerical tool that yields asset of parameters upon which a particular case or model is evaluated. **ANOVA** input can be (as predicted by the current values model) and the observed values. The parameter e predicts and **ANOVA** table are based on the assumption that the residual are normally distributed.

3-Experimentalprocedure:

The experimental setup of this study is shown in tables (4,5,6) all machining was done in lathe machine with Fifteen full test were run using to performe experments and several equipments were used as follows:

- Lathe machine was used , and workpiece in form bar of medium carbon steel , using ceramic cutting tool , with cutting speed , feed rate were selected according to tables.
- Surface roughness apparatus was used to measure surface roughness .

4-Result and discussion

The predicted Ra as a function of cutting speed and feed rate, depth of cut. The height of the surface represents the value of Ra table (7) shows the Ra, among the main effects, this table indicates that Ra

increased with increasing feed rate considerably . in this investigation, the average surface roughness values (Ra) obtained by a machining process with a full factorial design of (5) cutting speed and (3) feed rates using ceramic cutting tool as shown in tables (4,5,6) the results of the variouse analysis of cutting parameters, the main effect of cutting speed and feed rate on surface roughness were significant significant.

according to ceramic cutting tool , the lowest average surface roughness was obtained by machining processes and agree with prediction values of surface roughness according to table (7) and values of roughness in figure (1,2,3) at different cutting speed (60,80,90,100,110)mm/min , Figure (1) shows that measured values of Ra (1.27, 0.92) that's agree with predicted values of Ra (1.2024, 0.8254) Also , Figure (2) shows that the experimental value of Ra (2.15) agrees with the predicted value (2.2774) , Figure (3)also shows that the measured values of Ra (2.51, 1.78) agrees with the predicted values of Ra (2.6688, 1.9406) at cutting speed (100,110) m/min and according to the values in table (7) . Also tables (4,5,6) show that increasing cutting speed from (60-80) at feed rate 0.08 improvs surface roughness from Ra (2.141 μ m) to Ra (0.921 μ m) in table (5) and from Ra (5.152 μ m) to Ra (2.513 μ m) in table(6).

5- Conclusions

This study demonstrates the effect of cutting conditions (cutting speed, feed rate, depth of cut) on the surface roughness that produced by ceramic cutting tool with SPSS model calculations and reached to the following conclusions: 1- The

prediction accuracy of the surface roughness in this research with SPSS calculations are 90% .

2-The multiple regression model by SPSS predict surface roughness (Ra) with close agreement with experimental values .

3- Prediction of surface roughness by SPSS program lead to improve tool insert design and cutting condition.

4-Experiments prove that increasing cutting speed from 60 m/min to 110 m/min lead to improve the quality of surface roughness .

References

- [1] -Amsted B.H " Manufacturing processes",Seven Edition,P483, 1979.
- [2] -Bolten, W, ", Engineering material technology", third edition, P293.
- [3] -Chang -Xue "An experimental study of the impact of turning parameters on surface roughness , industrial engineering research conference , Bradley university , USA, 2001
- [4] -Doyle /Keyser ", Manufacturing processes and materials for engineering , second edition new jersey P,437. 1969.
- [5] -Halil Bil , S,Engin Kilic Acomparison of orthogonal cutting data from experiments with three different finite element models, international university, 2006.
- [6] -Yung- Chang", Estimation of tool wear in orthogonal cutting using finite center for net shape manufacturing , 2002.
- [7] -Jeffery,D, " Effect of cutting – edge Geometry and workpiece hardness on surface residual stress in finish hard turning of ASI 52100 Steel " ,journal of manfact, SCI ,eng,vol,122,No4 P 642 -649 , 2000.
- [8] -John Cooper, "The relationship between the workpiece extension length/diameter and surface roughness in turning applications" , industrial technology volume 23, no 2 , April,2007.
- [9]-Mostafa Hassan, production engineering, part1,p116, menoufia
- [10]- Stephn Smith , "An investication into the effect of Surface integrity on fatigue life in hard turning ",George institute of technology , 2001 .
- [11]- Trent. E.M. , " metal cutting" , Second edition, P159 London,. 1984
- [12]- Yann Landon,"Tool positioning error characterization in milling" , international Journal of machine and tool & manufacture 44, 2004.

Table (1) ANOVA

Model	Sum of Squares	df	Mean Square	F	Sig ^a
1 Regression	28.717	5	5.743	32.123	.000 ^a
Residual	1.609	9	.179		
Total	30.326	14			

a. Predictors: (constant) X1X2X3, X1,X3,X2,X1X3
b-Dependent Variable Ra

Table (2) Coefficients^a

	Un standardized Coefficients		Standardized Coefficients ts		
Mode	B	Std .error	Beta	t	Sig
1 Constant	1.428	.026			
X1	-1.77BE-02			.798	.446
X2	-4.534		-.215	-.688	.509
X3	-11.832		-.317	-.383	.710
X1X3	14.118		1.828	2.211	.054
X1X2X3	6.384	.081	-1.040	-.990	.348
	-8.004E-02	.179	.025	.026	.980
	4.714E-03				

$$Ra = \alpha_1 + \beta_1 X_1 + \beta_2 X_2 + \beta_3 X_3 + \beta_4 X_1 X_2 + \beta_5 X_1 X_3 + \beta_6 X_2 X_3 +$$

$$\beta_7 X_1 X_2 X_3$$

$$Ra = 1.428 - 1.778 * 10^{-2} X_1 - 4.534 X_2 + 14.118 X_3 - 8.004 * 10^{-2} X_1 X_3 + 4.714 * 10^{-3} X_1 X_2 X_3$$

Table (3) Mechanical properties of ceramics oxide [2]

Material	Density	Coefficient of expansion	Elastic modulus GPa	Max use temp C°	Resistivity Ωm
Alumina 99%	3.7	5.9	380	1600	10 ¹²
Alumina 95%	3.5	5.6=5.9	320	1400	10 ¹²
Alumina 90%	3.4	5-6	360	1200	10 ¹²

Table (4) Cutting conditions at feed rate 0.08 and depth of cut 0.25 mm

No	Cutting speed m/min	Feed rate mm/rev	Depth of cut mm	Surface roughness Ra μm
1-	60	0.08	0.25	2.141
2-	80	0.08	0.25	1.823
3-	90	0.08	0.25	1.270
4-	100	0.08	0.25	0.921
5-	110	0.08	0.25	0.234

Table (5) Cutting conditions at feed rate 0.1 and depth of cut 0.5 mm

No	Cutting speed m/min	Feed rate mm/rev	Depth of cut mm	Surface roughness Ra μm
1-	60	0.1	0.5	4.21
2-	80	0.1	0.5	3.830
3-	90	0.1	0.5	3.221
4-	100	0.1	0.5	2.150
5-	110	0.1	0.5	1.411

Table (6) Cutting conditions at feed rate 0.3 and depth of cut 0.7 mm

No	Cutting speed m/min	Feed rate mm/rev	Depth of cut mm	Surface roughness Ra μm
1-	60	0.3	0.7	5.152
2-	80	0.3	0.7	4.941
3-	90	0.3	0.7	3.325
4-	100	0.3	0.7	2.513
5-	110	0.3	0.7	1.782

Table (7) Experimental and prediction roughness casewise Diagnostics ^a

Case Number	Std Residual	Predict values Ra	Predict values Ra	Residual
1	-.455	2.14	2.3333	-.1923
2	.576	1.82	1.5794	.2436
3	.160	1.27	1.202	6.759E-
4	.226	.92	.8254	02
5	-.507	.23	.4485	9.557E-
6	-.875	4.21	4.5801	02
7	.949	3.83	3.4287	-.2145
8	.915	3.24	2.8531	-.3701
9	-.301	2.15	2.2774	.4013
10	-.688	1.41	1.7017	.3869
11	-1.016	5.15	5.5816	-.1274
12	1.929	4.94	4.1252	-.2907
13	-.170	3.33	3.3970	-.4296
14	-.368	2.51	2.6688	.8158
15	-.375	1.78	1.9406	-7.20E-
				02
				-.1558
				-.1586

a- Dependent Variable :Ra

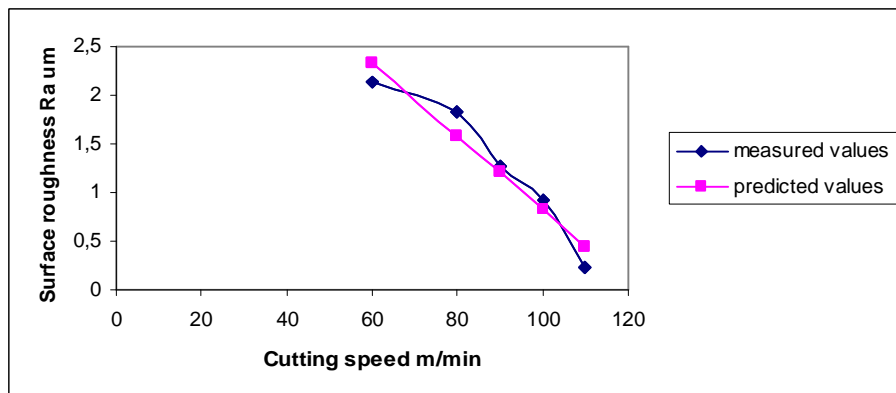


Figure (1) Relationship between cutting speed and surface finish at feed rate 0.08mm/rev and depth of cut 0.25mm

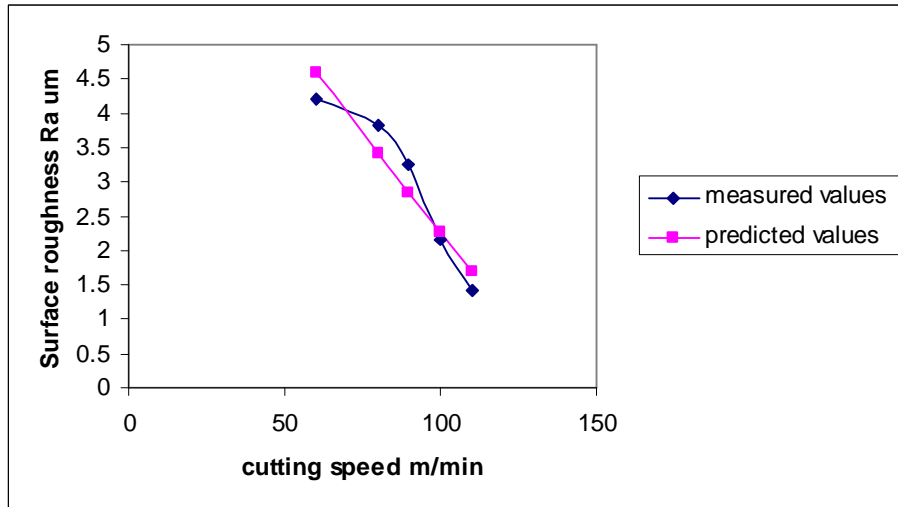


Figure (2) Relationship between cutting speed and surface finish at feed rate 0.1mm/rev and depth of cut 0.5mm

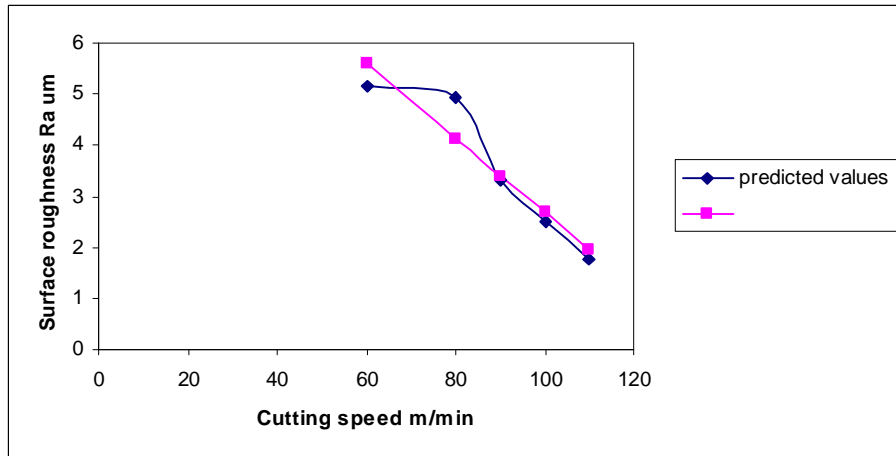


Figure (3) Relationship between cutting speed and surface finish at feed rate 0.3 mm/rev and depth of cut 0.7mm